



THE LEADER IN PERFORMANCE COOLING



Monster Jam



RYAN ANDERSON  
MONSTER JAM DRIVER  
SON-UVA DIGGER

## Performance Cooling Products

- Fluid Coolers
- Fluid Filtration
- Transmission Cooling Pans
- Electric Fans
- Electric Fan Controllers
- Belt Driven Fans
- Fuel Pumps



# Derale PERFORMANCE

Since 1975

Derale Performance  
 US Motor Works Performance Division  
 3901 Medford St.  
 Los Angeles, Ca 90063  
 Ph: (323) 266-3850  
 Fax: (323) 263-3948  
 DERALE.COM

While most cooling brands focus on one component of the vehicle, Derale aims to cool the drivetrain as a whole. Whether you drive a truck, race the tracks or crawl through the desert, your drivetrain is designed to function as a unit. The most powerful engine is only as strong as its ability to transfer that power to the wheels. Our approach to cooling is the same, cool as a unit. By controlling all major components of a vehicle, engine, transmission, power steering, fuel and differential you drastically increase efficiency and component life.

## Manufactures of...

Jeep Direct Fit Cooling Kits .....	3
Remote Fluid Coolers .....	4-16
Hi-flow Racing Remote Fluid Coolers .....	4-5
Hyper-Cool Remote Fluid Coolers .....	6-7
Atomic-Cool Remote Fluid Coolers .....	8-9
Electra-Cool Remote Fluid Coolers .....	10-11
Econo-Cool Remote Fluid Coolers .....	12
Dyno-Cool Remote Fluid Coolers .....	13
Plate & Fin Fluid Cooler .....	14
Fluid Control Thermostats .....	14
Inline Fan Control .....	15
Remote Fluid Coolers - Quick Guide .....	16
Ram Air Fluid Coolers .....	17-37
Series 9500 Plate & Fin Fluid Coolers .....	17
Series 10000 Stack Plate Fluid Coolers .....	18-23
Series 9000 Plate & Fin Fluid Coolers .....	24-25
Series 8000 Plate & Fin Fluid Coolers .....	26-27
Series 7000 Tube & Fin Fluid Coolers .....	28-31
Series 6000 Dyno-Cool Tube & Fin Fluid Coolers .....	31
Heat Sink Fluid Coolers .....	32-33
Frame Rail Fluid Cooler Kits .....	34
Radiator Cooling Fittings .....	35
Ram Air Coolers - Quick Guide .....	36-37
Fittings, Hose, Mount Kits & Accessories .....	38-39
Fluid Filtration Kits .....	40-45
Engine Oil Filter Adapter Kits .....	40-41
LS Engine Adapters .....	42
LS & LT Oil Gally Plugs .....	42
Filtration Relocation Kits .....	43

Remote Filter Mount Kits .....	44-45
Transmission Filter Kits .....	45
Transmission Cooling Pans & Accessories .....	46-49
Electric Fans .....	50-65
Single/Dual Brushless Powerpacks .....	50-51
Single Rad Fan Aluminum Powerpacks .....	52-53
Dual Rad Fan Aluminum Powerpacks .....	54-56
Single/Dual Rad Fan Molded Powerpacks .....	57
High Output Electric Fans .....	58-61
Dyno-Cool Electric Fans .....	62
Electric Fan Accessories .....	63
Electric Fans - Quick Guide .....	64-65
Electric Fan Controllers .....	66-68
PWM Electric Fan Controllers .....	66
High Amp Electric Fan Controllers .....	67
Adjustable Fan Controllers .....	68
Mechanical Fan Controller .....	68
Single Stage Fan Controllers .....	68
Performance Fuel Pumps .....	69
Belt Driven Fans and Fan Spacers .....	70-73
Index .....	74-75

## Recommend for...


Engine • Transmission • Power Steering  
 Fuel and Differential



Trusted by professionals around the world



US Motor Works, LLC and its employees are committed to providing an extensive line of consistent High Quality Products and the finest Customer Service and Satisfaction, through our Quality Management System based on ISO 9001:2015.



# JEEP DIRECT FIT COOLING KITS



THE LEADER IN PERFORMANCE COOLING



## JEEP JK Power Steering Cooler Kit

Application: 2007-2018 Jeep JK (All Models)

Features:

- Sturdy all aluminum heat Sink cooler design
- Black anodized finish
- Neatly mounts behind grille
- All necessary hardware included for a fast, easy, bolt-on installation

Part No.	BTU
20565	2300

## JEEP YJ/TJ Performance Electric Fan


Application: 1987-1996 Jeep Wrangler YJ - (4 & 6 Cyl)

1997-2006 Jeep Wrangler TJ - (4 & 6 Cyl)

Features:

- 16" High Output fan shroud assembly replaces factory fan clutch/shroud using factory mounting locations
- Radiator reservoir remount brackets included (use on some 4 & 6 cyl. Applications)
- Power steering remount brackets included (use on some 4 cyl. Applications)
- Kit includes 180°F thermostat switch to activate electric fan

Replacement 190°F Temp Sensor and Fitting: Part# 35030



Part No.	Repl. Fan Part No.	CFM	Amp Draw
20161	16136	2400	23.5

## JEEP YJ/TJ

### Automatic Transmission Cooler

Application: 1987-1996 Jeep Wrangler YJ - (4 & 6 Cyl)

1997-2006 Jeep Wrangler TJ - (4 & 6 Cyl)

Features:

- Mounts to frame rail with no drilling
- Powerful 8" electric fan
- Efficient 16 row Plate & Fin cooler
- Reduces fluid temperatures 30°F - 40°F

Part No.	Repl. Cooler Part No.	BTU	CFM	Amp Draw
20561	13750	22000	500	4.8



## JEEP Cherokee

### Performance Electric Fan

Application: 1987-2000 Jeep Cherokee

- Fits OE and aftermarket radiators
- Bolts directly to stock radiator mounts
- Three 9" IP68 Water Proof/Dust Proof high-output electric fans
- Fan controllers offered on pg. 66-68



Part No.	Repl. Fan	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E.	Dim F.	Dim G.	Dim H.
16839	16110	2400	27.6	31-1/2"	10-1/4"	1 1/8"	3-1/4"	23-3/4"	28"	7-3/4"	9-1/2"



THE LEADER IN PERFORMANCE COOLING

# Hi-Flow Racing Remote Fluid Coolers




## Features and Benefits

Derale is proud to introduce our latest addition to the remote cooler lineup. These Hi-Flow Racing Coolers are precision TIG welded and feature the most efficient tube design in the aftermarket, which supports up to 350 PSI with minimal pressure drop. All electric fans are IP68 certified (Water/Dust Proof) and designed to do their best under the most strenuous conditions. These coolers are perfect for everything from Drag racing to Off-Road.

- **Aircraft aluminum grade cooler design**
- **Extruded tube design with turbulators for maximum heat dissipation**
- **Precision TIG welded**
- **20 GPM Flow rate**
- **Supports up to 350 P.S.I., with minimal pressure drop**

## Dimensions

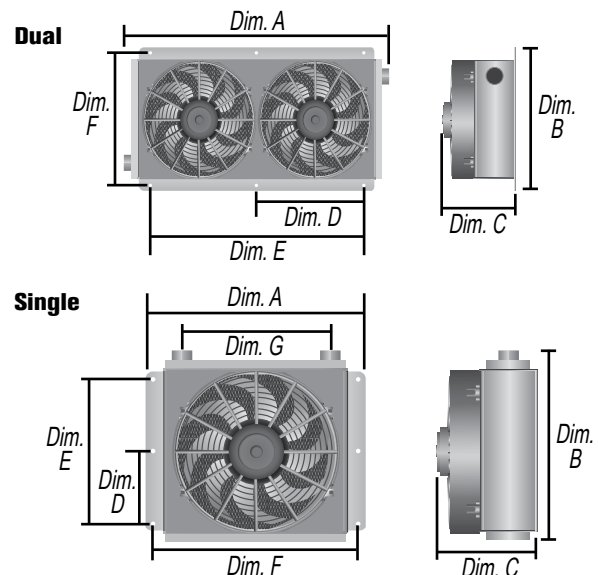



## Hi-Flow 11 Row Racing Cooler



- Designed for Puller applications
- 630 CFM Combined, (2) 5" IP68 Electric Fans
- Black Anodized Shroud
- 7/8-14 UNF O-Ring inlets

**Recommended for:**

Engines  
 Transmissions  
 Power Steering  
 Fuel and Differentials



Thermostat switches and aluminum fittings sold separately, see page 15, 38

Cooler Part No.	Inlet Size	Repl. Core	Repl. Fan	Fan CFM	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Mounting)
65840	7/8-14o-ring	61178	16105	630	33 oz.	95000	15"	8 1/4"	7"	5 1/2"	11"	7 3/16"

## Hi-Flow 18 Row Racing Cooler



- Designed for Puller applications
- 755 CFM, 9" IP68 Electric Fan
- Black Anodized Shroud
- 7/8-14 UNF O-Ring inlets

**Recommended for:**

Engines  
 Transmissions  
 Power Steering  
 Fuel and Differentials



Thermostat switches and aluminum fittings sold separately, see page 15, 38

Cooler Part No.	Inlet Size	Repl. Core	Fan CFM	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
65861	7/8-14 o-ring	61878	755	47 oz.	125000	11 7/8"	12 3/8"	8 1/2"	3 3/8"	6 3/4"	11"	7"

## Hi-Flow 18 Row Racing Cooler



- Designed for Puller applications
- 625 CFM, 9" IP68 Electric Fan
- Black Anodized Shroud
- 7/8-14 UNF O-Ring inlets

**Recommended for:**

Engines  
 Transmissions  
 Power Steering  
 Fuel and Differentials



Thermostat switches and aluminum fittings sold separately, see page 15, 38

Cooler Part No.	Inlet Size	Repl. Core	Repl. Fan	Fan CFM	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
65860	7/8-14 o-ring	61878	16109	625	47 oz.	125000	11 7/8"	12 3/8"	6 5/8"	3 3/8"	6 3/4"	11"	7"



THE LEADER IN PERFORMANCE COOLING


# Hyper-Cool Remote Fluid Coolers



## Features and Benefits

- Powerful high output electric fans
- Ultra efficient Series 10000 stack plate coolers
- Sturdy furnace-brazed aluminum construction tested to 250 PSI
- Aluminum shroud/mounting assembly
- Mounts anywhere space permits
- Clear anodized shrouds
- All coolers feature 7/8-14 UNF O-Ring inlets

## Dimensions

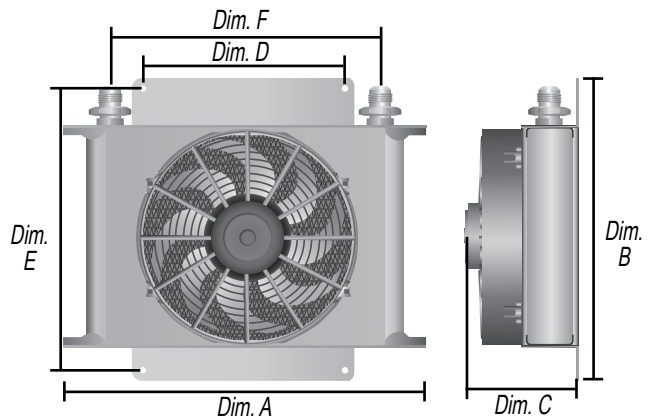

Thermostat switches and hardware available individually. See page 17





Part No.  
15870

Recommended for:  
Engines  
Transmissions



## Hyper-Cool Extreme

- Series 10000 40-row stack plate cooler
- 800 CFM, 10" electric fan
- Designed for Puller applications
- Cooler kit includes oil cooler and two aluminum AN fittings

Cooler Kit Part No.	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlets)
13870	-6 AN	54078	16110	26 oz	67000	13"	14 7/8"	5 5/8"	7 1/2"	13 9/16	10"
15870	-8 AN	54078	16110	26 oz	67000	13"	14 7/8"	5 5/8"	7 1/2"	13 9/16	10"
15875	-10 AN	54078	16110	26 oz	67000	13"	14 7/8"	5 5/8"	7 1/2"	13 9/16	10"
15876	-12 AN	54078	16110	26 oz	67000	13"	14 7/8"	5 5/8"	7 1/2"	13 9/16	10"



Part No.  
15860

Recommended for:  
Engines  
Transmissions  
Power Steering  
Fuel and Differentials

## Hyper-Cool

- Series 10000 25-row stack plate cooler
- 500 CFM, 8" electric fan
- Designed for Puller applications
- Cooler kit includes oil cooler, two aluminum AN fittings and two hose barb fittings

Transmission cooler kit



Install Kit Only Part # 13022 - 3/8" Hose  
13023 - 1/2" Hose

Engine oil cooler kit



Includes Sandwich Adapter Kit PN 25782,  
See page 40 for Adapter specifications.

Cooler Kit Part No.	Weatherproof IP68 Fan Part No.	Cooler Inlet Size	Trans Cooler Kit Part No.	Engine Oil Cooler Kit Part No.	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlets)
13760	-----	-6 AN	13960	-----	52578	16618	16 oz	46000	13"	10"	5 5/8"	7 1/2"	9"	10"
15860	-----	-8 AN	15960	15660*	52578	16618	16 oz	46000	13"	10"	5 5/8"	7 1/2"	9"	10"
15865	-----	-10 AN	-----	-----	52578	16618	16 oz	46000	13"	10"	5 5/8"	7 1/2"	9"	10"
-----	13764	7/8-14 o-ring	-----	-----	52578	16108	16 oz	46000	13"	10"	5 1/4"	7 1/2"	9"	10"



Part No.  
15845

Recommended for:  
Engine  
Transmission  
Power Steering  
Fuel and Differential



## Hyper-Cool Dual

- Series 10000 Highly efficient 19-row stack plate cooler
- 630 CFM (combined), (2) 5" electric fans
- Designed for Puller applications
- Cooler kit includes oil cooler and two aluminum AN fittings

Cooler Kit Part No.	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlets)
13740	-6 AN	51978	16105	12 oz	37000	13"	7 3/8"	4 7/8"	7 1/2"	7"	10"
15840	-8 AN	51978	16105	12 oz	37000	13"	7 7/16"	4 7/8"	7 1/2"	7"	10"
15845	-10 AN	51978	16105	12 oz	37000	13"	7 9/16"	4 7/8"	7 1/2"	7"	10"



THE LEADER IN PERFORMANCE COOLING


# Atomic-Cool Remote Fluid Coolers



## Features and Benefits

- Powerful high output electric fans
- Efficient Series 9000 16 row Plate & Fin coolers
- Sturdy furnace-brazed aluminum construction
- Mounts anywhere space permits
- Clear anodized shrouds
- All coolers feature 5/8-18 UNF O-Ring fittings

## Dimensions

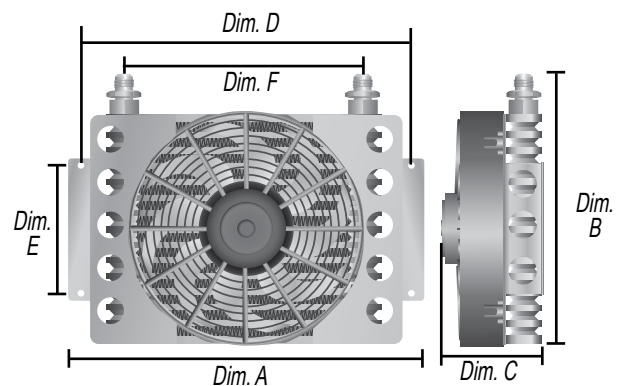

Thermostat switches and hardware available individually, see page 17





Part No.  
15850

Recommended for:  
Engine  
Transmission  
Power Steering  
Fuel and Differential

## Atomic-Cool Fluid Cooler

- Series 9000 16-row Plate & Fin cooler
- 500 CFM, 8" Electric fan
- Designed for Puller applications
- Cooler assembly includes oil cooler, two black anodized aluminum AN and hose barb adapter fittings



Cooler Kit Part No.	Weatherproof IP68 Fan Part No.	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlets)
13750	-----	-6 AN	13751	16618	17 oz	22000	12 3/4"	9 3/8"	4 5/16"	11 5/8"	4"	8 9/16"
15850	-----	-8 AN	15851	16618	17 oz	22000	12 3/4"	9 3/8"	4 5/16"	11 5/8"	4"	8 9/16"
-----	13754	-6 & -8 AN	15851	16108	17 oz	22000	12 3/4"	9 3/8"	3 15/16"	11 5/8"	4"	8 9/16"



Part No.  
13950

## Atomic-Cool Transmission Cooler Kits

- Extends transmission service life by preventing heat-related component failure & fluid breakdown
- Hardware kit includes in-line fan control, high-pressure/high temperature hose & mounting hardware

Install Kit Only Part # 13022 - 3/8" Hose  
13023 - 1/2" Hose



Trans Cooler Kit Part No.	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlets)
13950	-6 AN	13751	16618	17 oz	22000	12 3/4"	9 3/8"	4 5/16"	11 5/8"	4"	8 9/16"
15950	-8 AN	15851	16618	17 oz	22000	12 3/4"	9 3/8"	4 5/16"	11 5/8"	4"	8 9/16"



## Atomic-Cool Engine Oil Cooler Kit

- Helps reduce engine oil temperature
- Extends engine life
- Hardware kit includes in-line fan control, sandwich adapter, hose barb adapters, high-pressure/high temperature hose & mounting hardware



Includes Sandwich Adapter Kit PN 25782, See page 40 for Adapter specifications.

Engine Oil Cooler Kit Part No.	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlets)
15450*	-8 AN	15851	16618	17 oz	22000	12 3/4"	9 3/8"	4 5/16"	11 5/8"	4"	8 9/16"



THE LEADER IN PERFORMANCE COOLING

# Electra-Cool Remote Fluid Coolers




## Features and Benefits


- Powerful high output electric fans
- Efficient Series 7000 Tube & Fin coolers
- Copper/Aluminum construction
- Mounts anywhere space permits
- Clear anodized mounting brackets
- All coolers feature AN inlets

## Dimensions

### Single Circuit

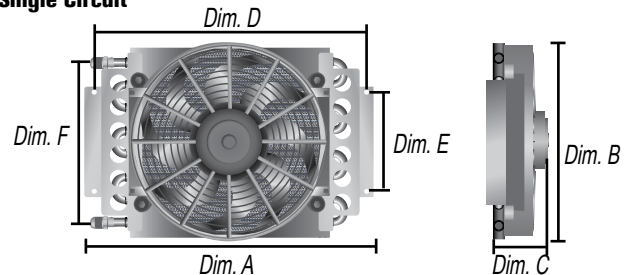

### Dual Circuit

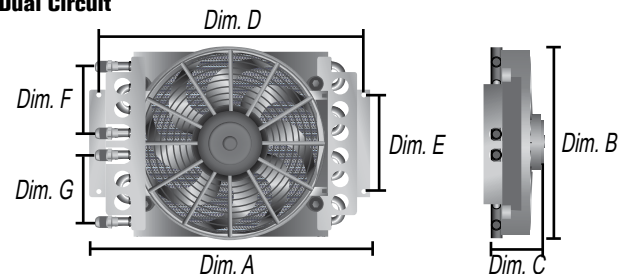

Thermostat switches available individually, see page 17





Part No.  
13700

## Electra-Cool Fluid Cooler Single & Dual Circuit

Recommended for:  
Engine  
Transmission  
Power Steering  
Fuel and Differential

- Series 7000 Tube & Fin cooler
- 650 cfm, Powerful 10" electric fan
- Designed for Puller applications
- Aluminum AN hose barb adapter fittings included



Cooler Kit Part No.	No. of Passes	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlet to Inlet)	Dim. G (Inlet to Inlet)
13700	16	-6 AN	13300	16620	19 oz.	14000	15 3/4"	11 1/2"	5"	14 3/4"	5 1/4"	8 3/4"	--
15800	16	-8 AN	15300	16620	19 oz.	14000	15 3/4"	11 1/2"	5"	14 3/4"	5 1/4"	8 3/4"	--
13720	8	-6 AN	13320	16620	9 oz.	7000	15 3/4"	11 1/2"	4"	14 3/4"	5 1/4"	8 3/4"	--
15820	8	-8 AN	15320	16620	9 oz.	7000	15 3/4"	11 1/2"	4"	14 3/4"	5 1/4"	8 3/4"	--
<b>Dual Circuit</b>													
15200	8 & 8 pass	-8 AN	15301	16620	9 oz.	16000	15 3/4"	11 1/2"	5"	14 3/4"	5 1/4"	4 1/8"	4 1/8"
15220	4 & 4 pass	-8 AN	--	16620	4.5 oz.	8000	15 3/4"	11 1/2"	4"	14 3/4"	5 1/4"	3 3/4"	3 3/4"



Part No.  
13900

## Electra-Cool Transmission Cooler Kits

- Extends transmission service life by preventing heat related component failure & fluid breakdown
- Hardware kit includes in-line fan control, high-pressure/high temperature hose and mounting hardware

Install Kit Only Part # 13022 - 3/8" Hose  
13023 - 1/2" Hose



Trans Cooler Kit Part No.	No. of Passes	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlet to Inlet)	Dim. G (Inlet to Inlet)
13900	16	-6 AN	13300	16620	19 oz.	14000	15 3/4"	11 1/2"	5"	14 3/4"	5 1/4"	8 3/4"	--
15900	16	-8 AN	15300	16620	19 oz.	14000	15 3/4"	11 1/2"	5"	14 3/4"	5 1/4"	8 3/4"	--



## Electra-Cool Engine Oil Cooler Kit

- Helps reduce coolant temperature
- Extends engine life
- Hardware kit includes in-line fan control, sandwich adapter, hose barb adapters, high-pressure/high temperature hose and mounting hardware



Includes Sandwich Adapter Kit PN 25782, See page 40 for Adapter specifications.

Engine Oil Cooler Kit Part No.	No. of Passes	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlet to Inlet)	Dim. G (Inlet to Inlet)
15500*	16	-8 AN	15300	16620	19 oz.	14000	15 3/4"	11 1/2"	5"	14 3/4"	5 1/4"	8 3/4"	--



THE LEADER IN PERFORMANCE COOLING

# Econo-Cool Remote Fluid Coolers




Part No.  
13730



## Econo-Cool Single Circuit

- Efficient 6 pass copper/aluminum tube and fin cooler
- 400 CFM, reversible 8" electric fan
- Clear anodized aluminum bracket

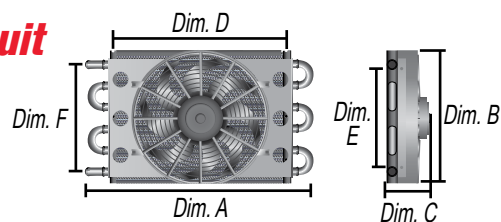


**Recommended for:**  
**Engine**                      **Power Steering**  
**Transmission**            **Fuel and Differential**

Cooler Part No.	No. of Passes	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlet to Inlet)
13730	6	11/32" Barb	13731	16618	4 oz.	6000	12 3/4"	7 5/8"	3 3/4"	10 7/8"	5"	6 1/4"
15830	6	1/2" Barb	15831	16618	4 oz.	6000	12 3/4"	7 5/8"	3 3/4"	10 7/8"	5"	6 1/4"



## Econo-Cool Dual Circuit

- Efficient 4 pass & 2 pass copper/aluminum tube and fin cooler
- 400 CFM, reversible 8" electric fan
- -8 AN fittings with hose barb fittings included
- Clear anodized aluminum bracket

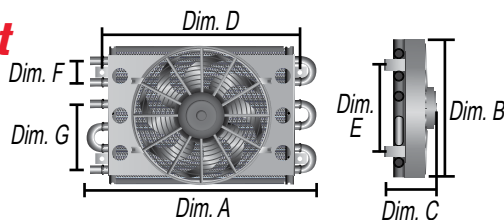

**Recommended for:**  
**Engine**                      **Power Steering**  
**Transmission**            **Fuel and Differential**


Cooler Part No.	No. of Passes	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlet to Inlet)	Dim. G (Inlet to Inlet)
15230	4 & 2	-8 AN	15331	16618	4 oz. & 2.25 oz	6000	13 15/16"	7 5/8"	3 3/4"	10 7/8"	5"	3 3/4"	1 1/4"



# Dyno-Cool Remote Fluid Coolers




THE LEADER IN PERFORMANCE COOLING

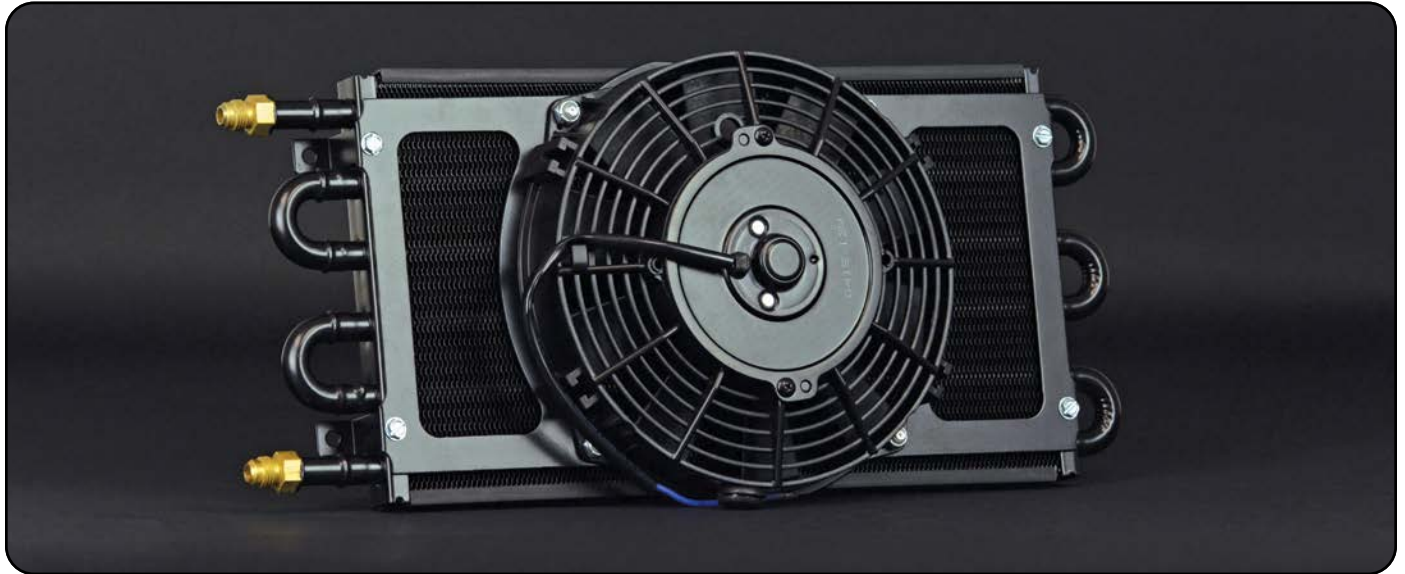

## Dyno-Cool - Barbed Inlets

- Efficient 6 or 8 pass copper/ aluminum tube and fin cooler with 11/32" Barb inlets
- 475 CFM, reversible 9" electric fan
- Designed for Puller applications
- Black powder coated steel bracket

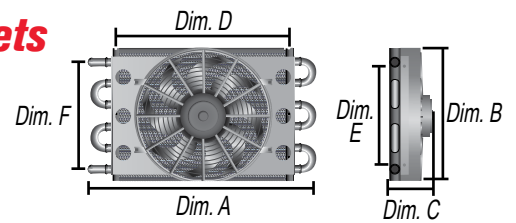


Recommended for:  
Transmission Fuel  
Power Steering Differential

Cooler Part No.	No. of Passes	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlet to Inlet)
12742	8	11/32" Barb	13107	16909	10 oz.	7500	12 3/4"	10 1/4"	3 5/8"	10 7/8"	5"	8 3/4"



## Dyno-Cool - 6AN Inlets

- Efficient 6 or 8 pass copper/ aluminum tube and fin cooler with -6 AN or -8 AN " Barb inlets
- 475 CFM, reversible 9" electric fan
- Designed for Puller applications
- Black powder coated steel bracket

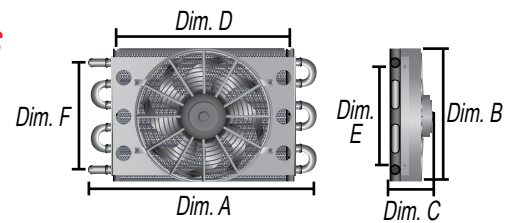

Recommended for:  
Transmission Fuel  
Power Steering Differential

Part No.  
12731


Cooler Part No.	No. of Passes	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlet to Inlet)
12730	6	-6 AN	13311	16908	4 oz.	5000	13 5/8"	7 5/8"	3 5/8"	10 7/8"	5"	6 1/4"
12731	6	-6 AN	13313	16908	4.5 oz.	6000	17 1/2"	7 5/8"	3 3/4"	14 3/4"	5"	6 1/4"
12732	8	-6 AN	13317	16909	10 oz.	7500	13 5/8"	10 1/4"	3 5/8"	10 7/8"	5"	8 3/4"
12733	8	-6 AN	13314	16909	5 oz.	8000	17 1/2"	10 1/4"	3 3/4"	14 3/4"	5"	8 3/4"



THE LEADER IN PERFORMANCE COOLING

# Remote Fluid Coolers

## Plate & Fin Fluid Cooler

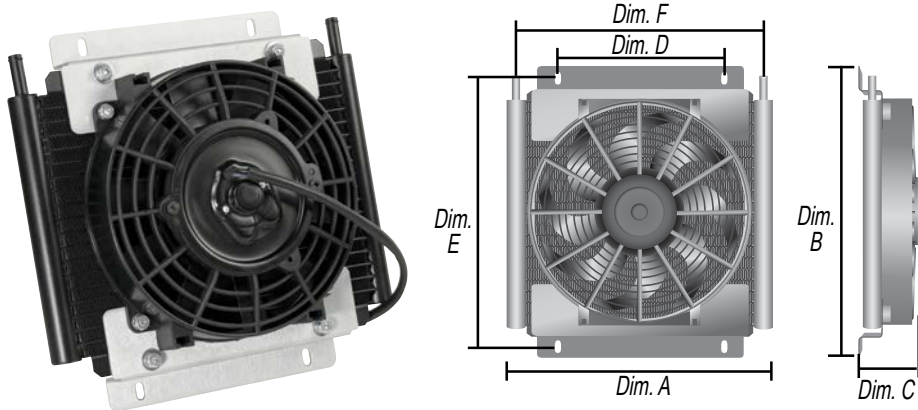

- Efficient 18 row plate and fin cooler
- 400 CFM, reversible 8" electric fan
- Clear anodized aluminum brackets

Recommended for:  
**Transmission**    **Fuel**  
**Power Steering**    **Differential**




Cooler Part No.	No. of Rows	Inlet Size	Repl. Core	Repl. Fan	Fluid Capacity	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Inlet to Inlet)
13735	18	11/32" Barb	33503	16618	5.5 oz.	20000	11"	11"	3 3/4"	5 1/2"	10"	10 1/4"

## Fluid Control Thermostats



### Controlled Closed Circuit

Below 180°F the valve opens, with 90% of the fluid bypassing the cooler. The remaining 10% of the oil flows through the cooler, maintaining constant system pressure, preventing air pockets and eliminating cold oil shock.

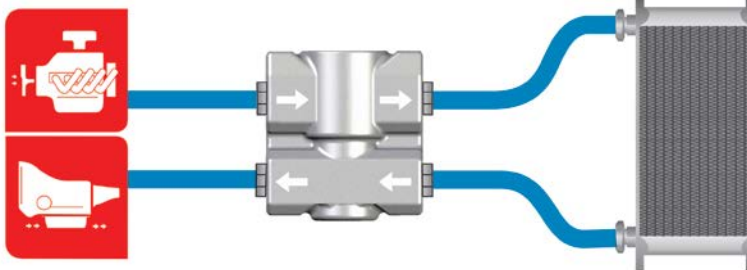

### Maximum Flow

When temperatures exceed 180°F the thermostatic valve closes, allowing 100% flow through the oil cooler. This allows for ultimate control of oil temperatures under normal to extreme conditions.

**20 GALLONS PER MINUTE**



### Thermostat with Fittings

Inlets	Part No.
3/8" NPT	13011
1/2" NPT	15719



### Thermostat Only

Inlets	Part No.
3/8" NPT	25011
1/2" NPT	25719



### Thermostat with Bracket Kit

Inlets	Part No.
3/8" NPT	25791
1/2" NPT	25792



### Installation Kit Only

Inlets	Part No.
3/8" NPT	13026
1/2" NPT	15726



# In-line Fan Control



THE LEADER IN PERFORMANCE COOLING



Available in -6 AN, -8 AN, or -10 AN anodized aluminum housing

## Premium Series In-line Fan Control

- Offered in 180°F or 190°F Turn-On temperature
- Turn-Off temperature is preset 15° below turn-on temperature
- Black Anodized aluminum swivel housing allows T-stat to be clocked in the desired position

Inlets	180° Part No.	190° Part No.
-6 AN x -6 AN	35020	35025
-8 AN x -8 AN	35021	35026
-10 AN x -10 AN	35022	35027



Available in -6 AN, or -8 AN anodized aluminum housing

## Standard Series In-line Fan Control

- 180°F Turn-On temperature
- Turn-Off temperature is preset 15° below turn-on temperature
- Black Anodized Aluminum AN hose barb adapter fittings included

Inlets	Part No.
-6 AN x -6 AN	13021
-8 AN x -8 AN	15721

# Remote Fluid Coolers - Quick Guide

## Remote Fluid Cooler Kits

Size	Part No.	Series	Description	Width	Height	Depth	Page
10" to 17" Width	13735	Plate & Fin Cooler	11/32", 18 Row Plate & Fin Cooler	11"	11"	3 3/4"	14
	65860	Hi-Flow Racing Cooler	18 Row	11 7/8"	12 3/8"	6 5/8"	5
	65861	Hi-Flow Racing Cooler	18 Row	11 7/8"	12 3/8"	8 1/2"	5
	13730	Econo-Cool	11/32" Barb, 6 Pass Tube & Fin Cooler	12 3/4"	7 5/8"	3 3/4"	12
	15830	Econo-Cool	1/2" Barb, 6 Pass Tube & Fin Cooler	12 3/4"	7 5/8"	3 3/4"	12
	13754	Atomic-Cool / Weatherproof	-6 & -8 AN, 16 Row Plate & Fin Cooler	12 3/4"	9 3/8"	3 15/16"	9
	13750	Atomic-Cool	-6 AN, 16 Row Plate & Fin Cooler	12 3/4"	9 3/8"	4 5/16"	9
	15850	Atomic-Cool	-8 AN, 16 Row Plate & Fin Cooler	12 3/4"	9 3/8"	4 5/16"	9
	12742	Dyno-Cool	11/32", 8 Pass Tube & Fin Cooler	12 3/4"	10 1/4"	3 5/8"	13
	12730	Dyno-Cool	-6 AN, 6 Pass Tube & Fin Cooler	13 5/8"	7 5/8"	3 5/8"	13
	12732	Dyno-Cool	-6 AN, 8 Pass Tube & Fin Cooler	13 5/8"	10 1/4"	3 5/8"	13
	15230	Econo-Cool Dual Circuit	-8 AN, 4 & 2 Pass Tube & Fin Cooler	13 15/16"	7 5/8"	3 3/4"	12
	13740	Hyper-Cool Dual	-6 AN, 19 Row Stack Plate Cooler	13"	7 3/8"	4 7/8"	7
	15840	Hyper-Cool Dual	-8 AN, 19 Row Stack Plate Cooler	13"	7 7/16"	4 7/8"	7
	15845	Hyper-Cool Dual	-10 AN, 19 Row Stack Plate Cooler	13"	7 9/16"	4 7/8"	7
	13760	Hyper-Cool	-6 AN, 25 Row Stack Plate Cooler	13"	10"	5 5/8"	7
	15860	Hyper-Cool	-8 AN, 25 Row Stack Plate Cooler	13"	10"	5 5/8"	7
	15865	Hyper-Cool	-10 AN, 25 Row Stack Plate Cooler	13"	10"	5 5/8"	7
	13764	Hyper-Cool / Weatherproof	7/8"-14 o-ring, 25 Row Stack Plate Cooler	13"	10"	6 3/4"	7
	13870	Hyper Cool Extreme	-6 AN, 40 Row Stack Plate Cooler	13"	14 7/8"	5 5/8"	7
	15870	Hyper Cool Extreme	-8 AN, 40 Row Stack Plate Cooler	13"	14 7/8"	5 5/8"	7
	15875	Hyper Cool Extreme	-10 AN, 40 Row Stack Plate Cooler	13"	14 7/8"	5 5/8"	7
	15876	Hyper Cool Extreme	-12 AN, 40 Row Stack Plate Cooler	13"	14 7/8"	5 5/8"	7
	65840	Hi-Flow Racing Cooler Dual	11 Row	15"	8 1/4"	7"	5
	13720	Electra-Cool	-6 AN, 8 Pass Tube & Fin Cooler	15 3/4"	11 1/2"	4"	11
	15220	Electra-Cool Dual Circuit	-8 AN, 4 & 4 Pass Tube & Fin Cooler	15 3/4"	11 1/2"	4"	11
	15820	Electra-Cool	-8 AN, 8 Pass Tube & Fin Cooler	15 3/4"	11 1/2"	4"	11
	13700	Electra-Cool	-6 AN, 16 Pass Tube & Fin Cooler	15 3/4"	11 1/2"	5"	11
	15200	Electra-Cool Dual Circuit	-8 AN, 8 & 8 Pass Tube & Fin Cooler	15 3/4"	11 1/2"	5"	11
	15800	Electra-Cool	-8 AN, 16 Pass Tube & Fin Cooler	15 3/4"	11 1/2"	5"	11
12731	Dyno-Cool	-6 AN, 6 Pass Tube & Fin Cooler	17 1/2"	7 5/8"	3 3/4"	13	
12733	Dyno-Cool	-6 AN, 8 Pass Tube & Fin Cooler	17 1/2"	10 1/4"	3 3/4"	13	

## Remote Fluid Cooler - Transmission Oil Cooler Kits

Size	Part No.	Series	Description	Width	Height	Depth	Page
10" to 15" Width	13950	Atomic-Cool	-6 AN, 16 Row Plate & Fin Cooler	12 3/4"	9 3/8"	4 5/16"	9
	15950	Atomic-Cool	-8 AN, 16 Row Plate & Fin Cooler	12 3/4"	9 3/8"	4 5/16"	9
	13960	Hyper-Cool	-6 AN, 25 Row Stack Plate Cooler	13"	10"	5 5/8"	7
	15960	Hyper-Cool	-8 AN, 25 Row Stack Plate Cooler	13"	10"	5 5/8"	7
	13900	Electra-Cool	-6 AN, 16 Pass Tube & Fin Cooler	15 3/4"	11 1/2"	5"	11
	15900	Electra-Cool	-8 AN, 16 Pass Tube & Fin Cooler	15 3/4"	11 1/2"	5"	11

## Remote Fluid Cooler - Engine Oil Cooler Kits


Size	Part No.	Series	Description	Width	Height	Depth	Page
10" to 15" Width	15660	Hyper-Cool	-8 AN, 25 Row Stack Plate Cooler	13"	10"	5 5/8"	7
	15450	Atomic-Cool	-8 AN, 16 Pass Plate & Fin Cooler	15 3/4"	11 1/2"	5"	9
	15500	Electra-Cool	-8 AN, 16 Pass Tube & Fin Cooler	15 3/4"	11 1/2"	5"	11



# SERIES 9500 Plate & Fin Fluid Cooler Kits




THE LEADER IN PERFORMANCE COOLING

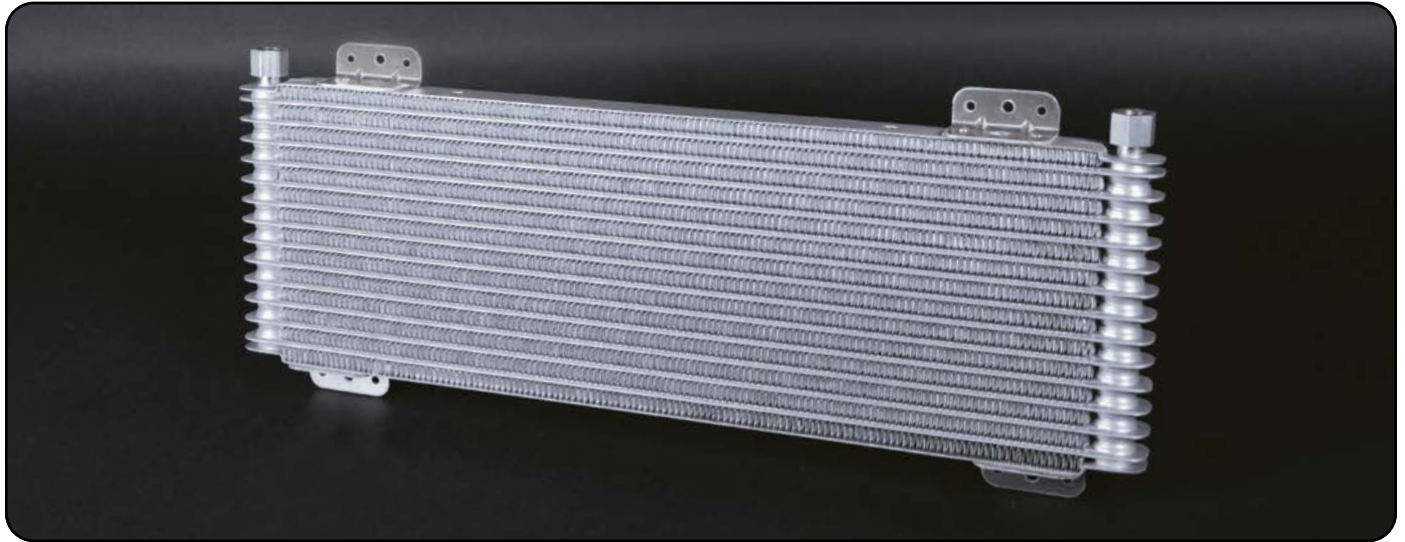

## Features and Benefits

- Integrated, high-flow turbulators
- Sturdy furnace-brazed aluminum construction tested to 250 P.S.I.
- 5/8" Inverted Flare Female inlets
- 4 integrated mounting points
- Recommended for: Transmission, Power Steering, Differential and Fuel

## Dimensions

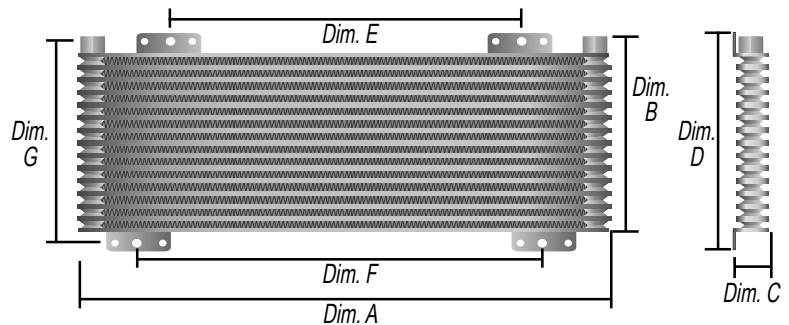

## Transmission Cooler Kit

- Extends transmission service life by preventing heat-related component failure & fluid breakdown
- Improves transmission performance
- Hardware kit includes 3/8" barb fittings, high-pressure/high temperature hose, radiator adapter & mounting hardware

Trans Cooler Kit Part No.	Cooler Part No.	No. of Rows	Inlet Size	Fluid Capacity	GVW	BTU	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Overall Height)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Mounting)	Dim. H (Inlet to Inlet)
13633	33633	13	5/8" Inverted Flare	20 oz.	34000	33000	22 3/4"	8"	1 1/4"	9 1/4"	15 3/4"	17 3/4"	8 1/2"	21 3/8"



THE LEADER IN PERFORMANCE COOLING

# SERIES 10000


## Stack Plate Fluid Coolers



### Features and Benefits

- Ultra efficient heat-exchanger with built-in high-flow turbulators
- Sturdy furnace-brazed aluminum construction tested to 250 P.S.I.
- 7/8"-14 UNF O-Ring cooler inlets & 4 integrated mounting points
- Available in 6 cooler core sizes: 10, 16, 19, 25, 34 & 40-rows
- Recommended for: Engine, Transmission, Power Steering, Differential and Fuel

### Dimensions

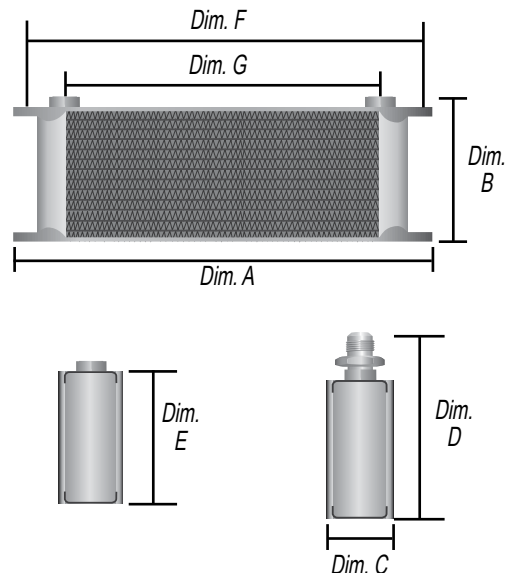



# SERIES 10000 Stack Plate Fluid Coolers



THE LEADER IN PERFORMANCE COOLING

## COOLER CORE ONLY



**10 row**  
**Capacity 6 oz.**  
**BTU: 20000**

Cooler Part No.	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
51078	13"	3 5/8"	2"	2 7/8"	12 1/4"	10"



**16 row**  
**Capacity 10 oz.**  
**BTU: 32000**

Cooler Part No.	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
51678	13"	5 1/2"	2"	4 7/8"	12 1/4"	10"



**19 row**  
**Capacity 12 oz.**  
**BTU: 37000**

Cooler Part No.	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
51978	13"	6 3/8"	2"	5 9/16"	12 1/4"	10"



**25 row**  
**Capacity 16 oz.**  
**BTU: 46000**

Cooler Part No.	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
52578	13"	8 1/4"	2"	7 7/16"	12 1/4"	10"



**34 row**  
**Capacity 20 oz.**  
**BTU: 59000**

Cooler Part No.	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
53478	13"	10 7/8"	2"	10 1/16"	12 1/4"	10"



**40 row**  
**Capacity 26 oz.**  
**BTU: 67000**

Cooler Part No.	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
54078	13"	12 7/8"	2"	12"	12 1/4"	10"



THE LEADER IN PERFORMANCE COOLING

# SERIES 10000

## Stack Plate Fluid Coolers



Part No. 59006



Part No. 59008



Part No. 59010



Part No. 59012

### COOLERS WITH STRAIGHT FITTINGS



Part No. 51078

**Part No. 51006**  
10 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 51008**  
10 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 51010**  
10 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**NEW** **Part No. 51012**  
10 Row Cooler with  
(2) -12 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings



Part No. 51678

**Part No. 51606**  
16 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 51608**  
16 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 51610**  
16 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**NEW** **Part No. 51612**  
16 Row Cooler with  
(2) -12 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings



Part No. 51978

**Part No. 51906**  
19 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 51908**  
19 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 51910**  
19 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**NEW** **Part No. 51912**  
19 Row Cooler with  
(2) -12 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings



Part No. 52578

**Part No. 52506**  
25 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 52508**  
25 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 52510**  
25 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**NEW** **Part No. 52512**  
25 Row Cooler with  
(2) -12 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings



Part No. 53478

**Part No. 53406**  
34 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 53408**  
34 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 53410**  
34 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**NEW** **Part No. 53412**  
34 Row Cooler with  
(2) -12 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings



Part No. 54078

**Part No. 54006**  
40 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 54008**  
40 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**Part No. 54010**  
40 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

**NEW** **Part No. 54012**  
40 Row Cooler with  
(2) -12 AN Male  
X 7/8"-14 UNF  
Straight Adapter Fittings

# SERIES 10000

## Stack Plate Fluid Coolers



THE LEADER IN PERFORMANCE COOLING



Part No. 59406



Part No. 59408



Part No. 59506



Part No. 59508



Part No. 59510

### COOLERS WITH 90° SWIVEL FITTINGS

**Part No. 51081**

10 Row Cooler with  
(2) 3/8" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51082**

10 Row Cooler with  
(2) 1/2" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51086**

10 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51088**

10 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51080**

10 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51681**

16 Row Cooler with  
(2) 3/8" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51682**

16 Row Cooler with  
(2) 1/2" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51686**

16 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51688**

16 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51680**

16 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51981**

19 Row Cooler with  
(2) 3/8" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51982**

19 Row Cooler with  
(2) 1/2" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51986**

19 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51988**

19 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 51980**

19 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 52581**

25 Row Cooler with  
(2) 3/8" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 52582**

25 Row Cooler with  
(2) 1/2" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 52586**

25 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 52588**

25 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 52580**

25 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 53481**

34 Row Cooler with  
(2) 3/8" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 53482**

34 Row Cooler with  
(2) 1/2" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 53486**

34 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 53488**

34 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 53480**

34 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 54081**

40 Row Cooler with  
(2) 3/8" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 54082**

40 Row Cooler with  
(2) 1/2" Hose Barb  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 54086**

40 Row Cooler with  
(2) -6 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 54088**

40 Row Cooler with  
(2) -8 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings

**Part No. 54080**

40 Row Cooler with  
(2) -10 AN Male  
X 7/8"-14 UNF  
90° Swivel Fittings





THE LEADER IN PERFORMANCE COOLING

# SERIES 10000

## Stack Plate Fluid Cooler Kits



Part No.  
13401

Trans Cooler Kits with Swivel fittings come with (2) 3/8" Hose Barb X 7/8"-14 90° Swivel Fitting



### Transmission Cooler Kits

- Extends transmission service life by preventing heat-related component failure & fluid breakdown
- Improves transmission performance
- Hardware kit includes -6AN fittings, hose barb adapters, high-pressure/high temperature hose, Insta-Dapt radiator adapter & mounting hardware

Trans Cooler Kit Part No.	Trans Cooler kit w/ 90° Swivel Fittings Part No.	Repl. Cooler Part No.	No. of Rows	Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Overall Height)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
13401	<b>NEW</b> 13411	51078	10	6 oz.	20000	-6 AN Male	13"	4"	2"	4 7/16"	2 7/8"	12 1/4"	10"
13402	<b>NEW</b> 13412	51678	16	10 oz.	32000	-6 AN Male	13"	6"	2"	6 7/16"	4 7/8"	12 1/4"	10"
13403	<b>NEW</b> 13413	51978	19	12 oz.	37000	-6 AN Male	13"	7"	2"	7 5/16"	5 3/4"	12 1/4"	10"

### SANDWICH ADAPTER KIT



### Engine Oil Cooler Kits - Sandwich

- Reduces oil temperatures
- Helps reduce coolant temperature
- Extends engine life
- Hardware kit includes 180°F thermostatic sandwich adapter, hose barb adapters, high-pressure/high temperature hose & mounting hardware

\*Includes Sandwich Adapter Kit PN 25702, See page 40 for Adapter specifications.

Engine Oil Cooler Kit Part No.	Repl. Cooler Part No.	No. of Rows	Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Overall Height)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
15602*	51078	10	6 oz.	20000	-8 AN Male	13"	4"	2"	4 9/16"	2 7/8"	12 1/4"	10"


### SPIN-ON ADAPTER KIT



### Engine Oil Cooler Kits - Spin-On

- Reduces oil temperatures
- Helps reduce coolant temperature
- Relocates filter mount (Uses Fram PH8A equivalent filter)
- Hardware kit includes spin-on adapter, ports-up filter mount, hose barb adapters, high-pressure/high temperature hose & mounting hardware


Engine Oil Cooler Kit Part No.	Repl. Cooler Part No.	No. of Rows	Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Overall Height)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
15651	51078	10	6 oz.	20000	-8 AN Male	13"	4"	2"	4 9/16"	2 7/8"	12 1/4"	10"

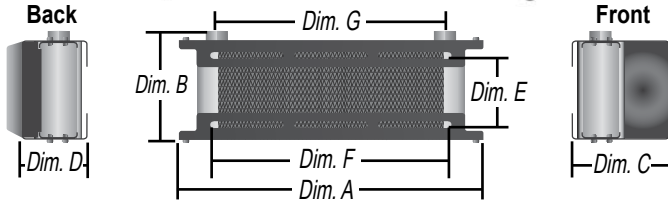

## Scoop Cooler Kit

- Aluminum mounting system, mounts to chassis rail
- Designed to capture & redirect airflow for max cooling
- Scoop shroud can be mounted to either side of cooler
- Highly efficient 10 Row, Series 10000 Cooler

Cooler Kit Part No.	Repl. Cooler Part No.	No. of Rows	Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Depth)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
50100	51078	10	6 oz.	20000	-10AN / 7/8"-14	13"	4"	5" Front	3 1/4" Back	2 3/16"	10 1/4" Max	10"

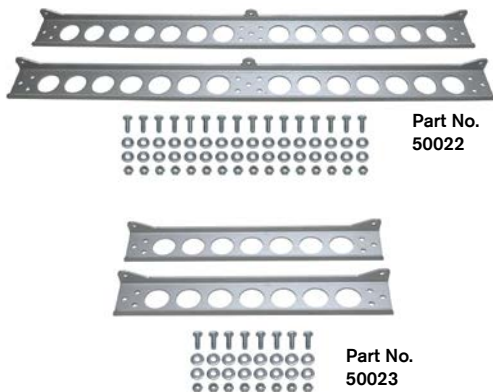

## Aluminum Mounting Brackets

- Heavy-Duty aluminum construction, clear anodized
- Symmetrical design makes multiple mounting configurations possible
- Brackets can be flipped for inside or outside mounting
- Available for Single or Dual Series 10000 cooler(s)

Part No.	Bracket Configuration	Width	Deep	Mounting Width
50022	Dual	27 7/8"	2 1/4"	13 1/2" / 13 1/2"
50023	Single	14 1/4"	2 1/4"	13 1/2"

## Steel Mounting Brackets

- Multi-position brackets
- Black powder coated steel brackets



Part No.
50020



THE LEADER IN PERFORMANCE COOLING


# SERIES 9000 Plate & Fin Fluid Cooler Kits



## Features and Benefits

- Integrated, high-flow turbulators
- Sturdy furnace-brazed aluminum construction tested to 250 P.S.I.
- 1/2" NPT female cooler inlets & 4 integrated mounting points
- Available in 5 cooler core sizes: 5, 9, 13, 17 & 21 rows
- Recommended for: Engine, Transmission, Power Steering, Differential and Fuel

## Dimensions

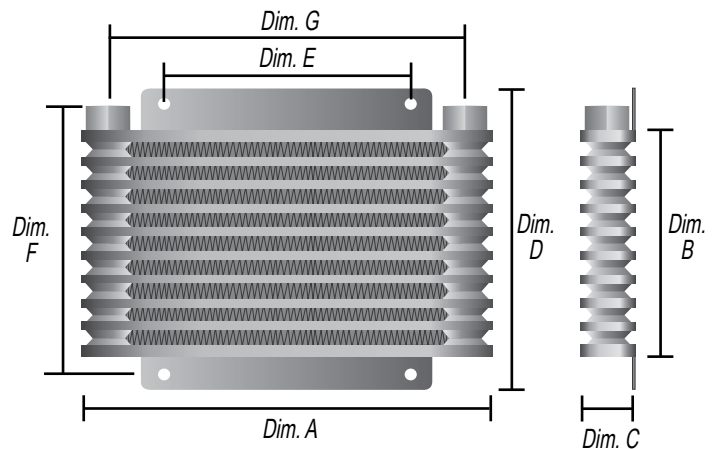



## SERIES 9000 Plate & Fin Fluid Cooler Kits



21 row



17 row



13 row



9 row



5 row

### COOLER CORE ONLY

Cooler Part No.	No. of Rows	Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Overall Height)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
33601	5	3 oz.	12500	1/2" FPT	9 3/4"	2 3/8"	1 1/4"	4 1/8"	6 11/16"	3 5/16"	8 1/2"
33602	9	6 oz.	14000	1/2" FPT	9 3/4"	4 1/2"	1 1/4"	6 1/4"	6 11/16"	5 7/16"	8 1/2"
33603	13	10 oz.	21000	1/2" FPT	9 3/4"	6 11/16"	1 1/4"	8 7/16"	6 11/16"	7 9/16"	8 1/2"
33604	17	12 oz.	23500	1/2" FPT	9 3/4"	8 7/8"	1 1/4"	10 5/8"	6 11/16"	9 13/16"	8 1/2"
33605	21	14 oz.	25000	1/2" FPT	9 3/4"	11"	1 1/4"	12 13/16"	6 11/16"	12"	8 1/2"



Part No. 13612

### Transmission Cooler Kits

- Extends transmission service life by preventing heat-related component failure & fluid breakdown
- Improves transmission performance
- Hardware kit includes 3/8" barb fittings, high-pressure/high temperature hose, Insta-Dapt radiator adapter & mounting hardware

Trans Cooler Kit Part No.	Repl. Cooler Part No.	No. of Rows	Capacity	GVW	BTU	Inlet Size	Hose Barb Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Overall Height)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
13611	33601	5	3 oz.	16000	12500	1/2" FPT	3/8"	9 3/4"	2 3/8"	1 1/4"	4 1/8"	6 11/16"	3 5/16"	8 1/2"
13612	33602	9	6 oz.	18000	14000	1/2" FPT	3/8"	9 3/4"	4 1/2"	1 1/4"	6 1/4"	6 11/16"	5 7/16"	8 1/2"
13613	33603	13	10 oz.	22000	21000	1/2" FPT	3/8"	9 3/4"	6 11/16"	1 1/4"	8 7/16"	6 11/16"	7 9/16"	8 1/2"
13614	33604	17	12 oz.	24000	23500	1/2" FPT	3/8"	9 3/4"	8 7/8"	1 1/4"	10 5/8"	6 11/16"	9 13/16"	8 1/2"
13615	33605	21	14 oz.	26500	25000	1/2" FPT	3/8"	9 3/4"	11"	1 1/4"	12 13/16"	6 11/16"	12"	8 1/2"



### Engine Oil Cooler Kits - Sandwich

- Reduces oil temperatures
- Helps reduce coolant temperature
- Hardware kit includes spin-on adapter, ports-up filter mount, hose barb adapters, high-pressure/high temperature hose & mounting hardware

\*Includes Sandwich Adapter Kit PN 25782, See page 40 for Adapter specifications.

Engine Oil Cooler Kit	Repl. Cooler Part No.	No. of Rows	Capacity	BTU	Inlet Size	Hose Barb Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Overall Height)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
15405*	33603	13	10 oz.	21000	1/2" FPT	3/8"	9 3/4"	6 11/16"	1 1/4"	8 7/16"	6 11/16"	7 9/16"	8 1/2"



### Engine Oil Cooler Kits - Spin-On

- Reduces oil temperatures
- Helps reduce coolant temperature
- Relocates filter mount (Uses Fram PH8A equivalent filter)
- Hardware kit includes spin-on adapter, ports-up filter mount, hose barb adapters, high-pressure/high temperature hose & mounting hardware

Install Kit Only Part # 15748 (Only four barb fittings included with install kit)

Cooler Mounting Kit Only Part # 13001 (Plastic rods, foam pads and clips)

Engine Oil Cooler Kit	Repl. Cooler Part No.	No. of Rows	Capacity	BTU	Inlet Size	Hose Barb Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Overall Height)	Dim. E (Mounting)	Dim. F (Mounting)	Dim. G (Inlet)
15451	33603	13	10 oz.	21000	1/2" FPT	3/8"	9 3/4"	6 11/16"	1 1/4"	8 7/16"	6 11/16"	7 9/16"	8 1/2"



THE LEADER IN PERFORMANCE COOLING

# SERIES 8000


## Plate & Fin Fluid Cooler Kits



### Features and Benefits

- **Integrated high-flow turbulators for maximum cooling efficiency**
- **Sturdy furnace-brazed aluminum construction tested to 250 p.s.i.**
- **11/32" hose barb inlets**
- **Available in 4 cooler core sizes: 9, 13, 18 & 24-rows**
- **Recommended for: Transmission, Power Steering, Differential and Fuel**

### Dimensions

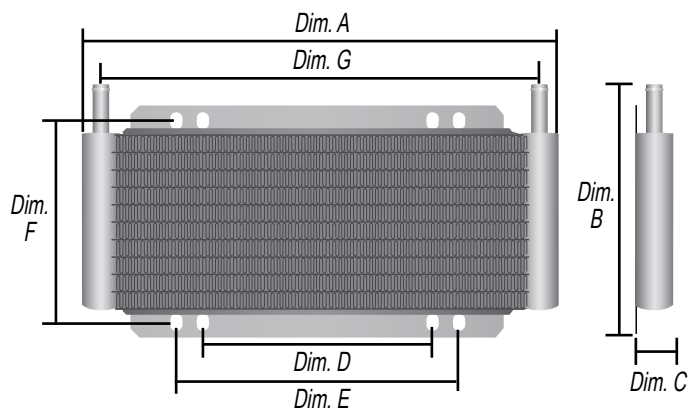

## SERIES 8000 Plate & Fin Fluid Cooler Kits



**24 row**



**18 row**  
(Inverted Flare)



**18 row**



**13 row**



**9 row**

### COOLER CORE ONLY

Part No.	No. of Rows	Fluid Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Mounting Height)	Dim. G (Inlets)
<b>33501</b>	9	2.5 oz.	11500	11/32" Barb	11"	5 3/4"	7/8"	5 1/4"	6 3/4"	4 1/2"	10 1/4"
<b>33502</b>	13	4 oz.	13500	11/32" Barb	11"	7 1/4"	7/8"	5 1/4"	6 3/4"	6 1/8"	10 1/4"
<b>33503</b>	18	5.5 oz.	20000	11/32" Barb	11"	9 1/4"	7/8"	5 1/4"	6 3/4"	8"	10 1/4"
<b>33504</b>	24	8 oz.	23000	11/32" Barb	11"	11 3/4"	7/8"	5 1/4"	6 3/4"	10 1/2"	10 1/4"
<b>33523</b>	18	5.5 oz.	20000	1/2"-20 Inverted Flare	11"	8 13/16"	7/8"	5 1/4"	6 3/4"	8"	10 1/4"



### Transmission Cooler Kits

- Extends transmission service life by preventing heat-related component failure & fluid breakdown
- Improves transmission performance
- Sturdy furnace-brazed aluminum construction
- Integrated, high-flow turbulators maximize cooling efficiency
- Hardware kit includes high pressure/high temperature hose, Insta-Dapt radiator adapter & mounting hardware

Part No.  
13502



Part No.	Repl. Cooler Part No.	No. of Rows	Fluid Capacity	GWV	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Mounting Height)	Dim. G (Inlets)
<b>13501</b>	33501	9	2.5 oz.	15500	11500	11/32" Barb	11"	5 3/4"	7/8"	5 1/4"	6 3/4"	4 1/2"	10 1/4"
<b>13502</b>	33502	13	4 oz.	18000	13500	11/32" Barb	11"	7 1/4"	7/8"	5 1/4"	6 3/4"	6 1/8"	10 1/4"
<b>13503</b>	33503	18	5.5 oz.	20500	20000	11/32" Barb	11"	9 1/4"	7/8"	5 1/4"	6 3/4"	8"	10 1/4"
<b>13504</b>	33504	24	8 oz.	22500	23000	11/32" Barb	11"	11 3/4"	7/8"	5 1/4"	6 3/4"	10 1/2"	10 1/4"
<b>13523</b>	33523	18	5.5 oz.	20500	20000	1/2"-20 Inverted Flare	11"	8 13/16"	7/8"	5 1/4"	6 3/4"	8"	10 1/4"



### Power Steering Cooler Kits

- Extends pump & seal life
- Reduces heat-related pump failure
- 11/32" hose barb inlets
- Integrated, high-flow turbulators maximize cooling efficiency
- Hardware kit includes high pressure/high temperature hose, and mounting hardware



Part No.	Repl. Cooler Part No.	No. of Rows	Fluid Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Mounting)	Dim. F (Mounting Height)	Dim. G (Inlets)
<b>13215</b>	33501	9	2.5 oz.	11500	11/32" Barb	11"	5 3/4"	7/8"	5 1/4"	6 3/4"	4 1/2"	10 1/4"





THE LEADER IN PERFORMANCE COOLING

# SERIES 7000

## Tube & Fin Fluid Coolers




### Features and Benefits

- Prevents heat-related component failure & fluid breakdown
- 1/2" copper tubing expanded into aluminum cooling fins
- Black powder coated finish
- Extruded plastic fin guards
- Recommended for: Engine, Transmission, Power Steering, Differential and Fuel




### Dimensions

Single Circuit

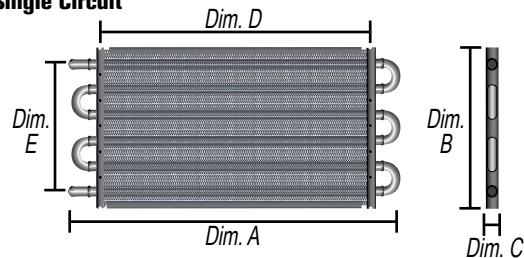

Dual Circuit

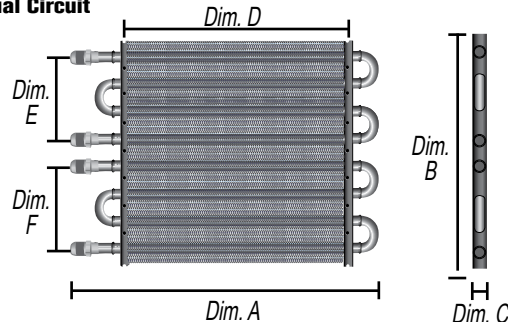

# SERIES 7000 Tube & Fin Fluid Coolers



THE LEADER IN PERFORMANCE COOLING



## COOLER CORE ONLY

Cooler Part No.	No. of Passes	Fluid Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Inlet to Inlet)	Dim. F (Inlet to Inlet)
13300	16	19.6 oz.	15000	-6 AN	13 1/2"	10 3/8"	1 3/4"	9 5/8"	9 1/8"	--
13309	4	2.5 oz.	1500	-6 AN	8 1/8"	5 1/8"	3/4"	4 7/8"	3 3/4"	--
13310	2	1.5 oz.	2000	-6 AN	8 1/8"	2 5/8"	1 3/4"	5 1/4"	1 1/4"	--
13311	4	4 oz.	3500	-6 AN	13 1/2"	5 1/8"	3/4"	9 5/8"	3 3/4"	--
13312	4	4.25 oz.	3500	-6 AN	17 1/2"	5 1/8"	3/4"	13 1/2"	3 3/4"	--
13313	6	7 oz.	5500	-6 AN	17 1/2"	7 5/8"	3/4"	13 1/2"	6 1/4"	--
13314	8	11.5 oz.	8000	-6 AN	17 1/2"	10 1/4"	3/4"	13 1/2"	8 3/4"	--
13315	10	13.5 oz.	10000	-6 AN	17 1/2"	12 5/8"	3/4"	13 1/2"	11 1/4"	--
13316	6	6 oz.	5500	-6 AN	13 1/2"	7 5/8"	3/4"	9 5/8"	6 1/4"	--
13317	8	6.25 oz.	7500	-6 AN	13 1/2"	10 1/4"	3/4"	9 5/8"	8 3/4"	--
13318	10	8 oz.	9500	-6 AN	13 1/2"	12 5/8"	3/4"	9 5/8"	11 1/4"	--
15300	16	19.6 oz.	15000	-8 AN	13 1/2"	10 3/8"	1 3/4"	9 5/8"	9 1/8"	--
<b>Dual Circuit</b>										
15301	8 pass and 8 pass	2.5 oz.	16000	(4) -8AN	13 15/16"	10 1/2"	1 3/4"	9 5/8"	4 1/8"	4 1/8"



THE LEADER IN PERFORMANCE COOLING

# SERIES 7000

## Tube & Fin Fluid Cooler Kits

### 6AN Inlets Transmission Cooler Kits

- Extends transmission service life by preventing heat-related component failure & fluid breakdown
- Improves transmission performance
- Hardware kit includes high-pressure/high-temperature hose, Insta-Dapt radiator adapter and mounting hardware



Part No.  
13306

Trans Cooler Kit Part No.	No. of Passes	Fluid Capacity	GVW	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Inlet to Inlet)
13303	6	7 oz.	18500	5500	-6AN	17 1/2"	7 5/8"	3/4"	13 1/2"	6 1/4"
13304	8	11.5 oz.	20500	8000	-6AN	17 1/2"	10 1/4"	3/4"	13 1/2"	8 3/4"
13306	6	6 oz.	15500	5500	-6AN	13 1/2"	7 5/8"	3/4"	9 5/8"	6 1/4"

### 1 1/32" Barb Inlets Transmission Cooler Kits

- Extends transmission service life by preventing heat-related component failure & fluid breakdown
- Improves transmission performance
- Hardware kit includes high-pressure/high temperature hose, Insta-Dapt radiator adapter & mounting hardware



Part No.  
13106

Trans Cooler Kit Part No.	No. of Passes	Fluid Capacity	GVW	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Inlet to Inlet)
13101	4	4 oz.	12000	3500	11/32" Barb	12 3/4"	5 1/8"	3/4"	9 5/8"	3 3/4"
13102	4	4.25 oz.	14000	3500	11/32" Barb	16 5/8"	5 1/8"	3/4"	13 1/2"	3 3/4"
13103	6	7 oz.	18500	6000	11/32" Barb	16 5/8"	7 5/8"	3/4"	13 1/2"	6 1/4"
13104	8	11.5 oz.	20500	8000	11/32" Barb	16 5/8"	10 1/4"	3/4"	13 1/2"	8 3/4"
13105	10	13.5 oz.	22500	10000	11/32" Barb	16 5/8"	12 5/8"	3/4"	13 1/2"	11 1/4"
13106	6	6 oz.	15500	6000	11/32" Barb	12 3/4"	7 5/8"	3/4"	9 5/8"	6 1/4"
13107	8	6.25 oz.	18200	7500	11/32" Barb	12 3/4"	10 1/4"	3/4"	9 5/8"	8 3/4"
13108	10	8 oz.	20500	9500	11/32" Barb	12 3/4"	12 5/8"	3/4"	9 5/8"	11 1/4"





Part No.  
15505

## Engine Oil Cooler Kits - Sandwich

- Reduces oil temperatures
- Helps reduce coolant temperature
- Extends engine life
- Hardware kit includes 180°F thermostatic sandwich adapter, 1/2" hose barb adapters, 1/2" high-pressure/high temperature hose and mounting hardware

\*See page 40 for Sandwich Adapter Kit specifications.

Engine Oil Cooler Kit Part No.	Repl. Cooler Part No.	Repl. Sandwich Adapter Kit Part No.	No. of Passes	Fluid Capacity	GVW	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Inlet to Inlet)
15505	15302	25782*	6	7 oz.	18500	6000	11/32" Barb	16 5/8"	7 5/8"	3/4"	13 1/2"	6 1/4"
15502	15302	25702*	6	7 oz.	18500	6000	11/32" Barb	16 5/8"	7 5/8"	3/4"	13 1/2"	6 1/4"
15503	15302	25720*	6	7 oz.	15500	6000	11/32" Barb	16 5/8"	7 5/8"	3/4"	13 1/2"	6 1/4"



Part No.  
13200

## Power Steering Cooler Kits

- Extends pump and seal life
- Reduces heat-related pump failure
- 1/2" copper tubing expanded into aluminum cooling fins
- Hardware kit includes high-pressure/high-temperature hose, clamps and mounting hardware


Power Steering Kit Part No.	Repl. Cooler Part No.	No. of Passes	Fluid Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Inlet to Inlet)
13200	----	2	2.25 oz.	1500	11/32" Barb	12 3/4"	2 5/8"	3/4"	9 5/8"	1 1/4"
13212	13309	4	2.5 oz.	3500	11/32" Barb	8 1/8"	5 1/8"	3/4"	4 7/8"	3 3/4"
13213	----	2	1 oz.	3500	11/32" Barb	8 1/8"	2 5/8"	3/4"	4 7/8"	1 1/4"



Part No.  
12903

## Series 6000 Transmission Cooler Kits

- Prevents heat-related component failure & fluid breakdown
- 1/2" aluminum tubing expanded into aluminum cooling fins
- Embossed turbulators in each tube agitate fluid
- Hardware kit includes high pressure/high temperature hose, Insta-Dapt radiator adapter with plastic rod mounting

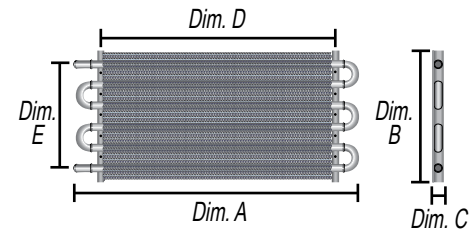

Trans Cooler Kit Part No.	No. of Passes	Fluid Capacity	GVW	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Inlet to Inlet)
12901	4	3.25 oz.	12000	3300	11/32" Barb	12 3/4"	5"	3/4"	10 1/8"	3 3/4"
12902	4	4 oz.	14000	3300	11/32" Barb	15 1/4"	5"	3/4"	12 1/4"	3 3/4"
12903	6	7 oz.	18500	5000	11/32" Barb	15 1/4"	7 1/2"	3/4"	12 1/4"	6 1/4"
12904	8	11 oz.	20500	7000	11/32" Barb	15 1/4"	10"	3/4"	12 1/4"	8 3/4"
12906	6	6 oz.	15500	4700	11/32" Barb	12 3/4"	7 1/2"	3/4"	10 1/8"	6 1/4"



THE LEADER IN PERFORMANCE COOLING


# Premium Heat Sink Fluid Coolers




## Features and Benefits

- Increased fluid capacity
- Features internal and external heat dissipating fins
- Stamped Internal Turbulator for increased efficiency
- Removable brackets allow cooler to be clocked
- Compact 3" diameter fits most frame rails

## Dimensions

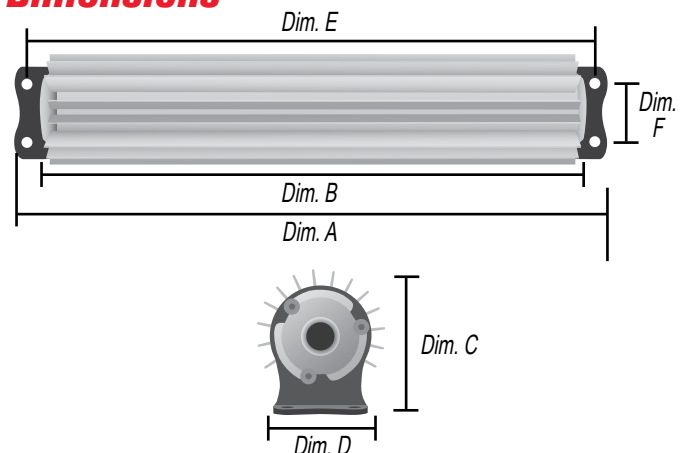

**Internal fins absorb heat**

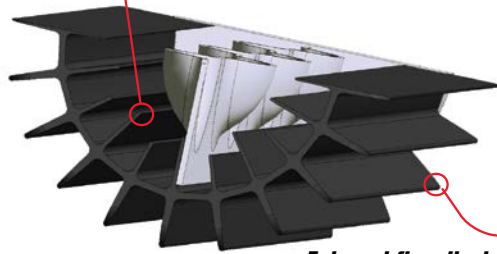

**External fins dissipate heat**

### Heat Dissipating Fins

The fins allow for better heat dissipation, the internal fins are designed to pull the heat out of the passing fluid while transferring that heat out through the external fins.




Part No. 13270

### Increased Fluid Capacity

We have completely redesigned the extrusion to maximize efficiency, by increasing the cavity, we have increased the amount of fluid in the cooler.

### Removable brackets allow cooler to be clocked

The removable brackets are a great addition to the heat sink lineup, they allow the cooler to be clocked in any mounting position desired.

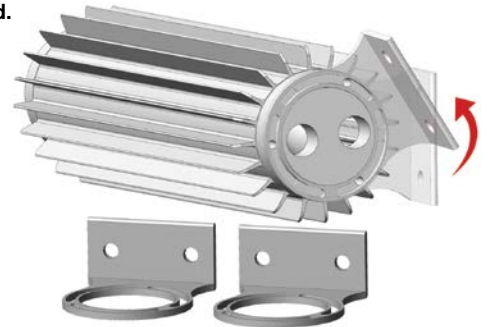

### Black Anodized Models

- Black anodized finish
- Available in single pass or dual pass
- Adjustable bracket design
- Fittings not included

**COOLER ONLY**

**COOLER ONLY**

Single Pass Part No.	Inlet Size	Dual Pass Part No.	Inlet Size	Fluid Capacity	Dim A. (Overall Length)	Dim B. (Core Length)	Dim C. (Height)	Dim D. (Width)	Dim E. (Mounting)	Dim F. (Mounting)
13269	1/2" NPT	13279	3/8" NPT	10 oz	10 1/4"	8 5/8"	3 1/4"	3"	9 5/8"	1 3/8"
13270	1/2" NPT	13280	3/8" NPT	14 oz	14 1/4"	12 5/8"	3 1/4"	3"	13 5/8"	1 3/8"
13271	1/2" NPT	13281	3/8" NPT	18 oz	17 1/4"	15 5/8"	3 1/4"	3"	16 5/8"	1 3/8"
13272	1/2" NPT	13282	3/8" NPT	22 oz	20 1/4"	18 5/8"	3 1/4"	3"	19 5/8"	1 3/8"
13277	1/2" NPT	13287	3/8" NPT	28 oz	25 1/4"	23 5/8"	3 1/4"	3"	24 5/8"	1 3/8"



Part No. 13260

### Clear Anodized Models

- Clear anodized finish - Black anodized brackets
- Available in single pass or dual pass
- Single Pass – 1/2" NPT, Dual Pass – 3/8" NPT
- Hardware kit includes aluminum hose barbs fittings


Single Pass Part No.	Inlet Size	Dual Pass Part No.	Inlet Size	Fluid Capacity	Dim A. (Overall Length)	Dim B. (Core Length)	Dim C. (Height)	Dim D. (Width)	Dim E. (Mounting)	Dim F. (Mounting)
13249	1/2" NPT	13259	3/8" NPT	10 oz	10 1/4"	8 5/8"	3 1/4"	3"	9 5/8"	1 3/8"
13250	1/2" NPT	13260	3/8" NPT	14 oz	14 1/4"	12 5/8"	3 1/4"	3"	13 5/8"	1 3/8"
13251	1/2" NPT	13261	3/8" NPT	18 oz	17 1/4"	15 5/8"	3 1/4"	3"	16 5/8"	1 3/8"
13252	1/2" NPT	13262	3/8" NPT	22 oz	20 1/4"	18 5/8"	3 1/4"	3"	19 5/8"	1 3/8"
13257	1/2" NPT	13267	3/8" NPT	28 oz	25 1/4"	23 5/8"	3 1/4"	3"	24 5/8"	1 3/8"





THE LEADER IN PERFORMANCE COOLING


# Frame Rail Fluid Cooler Kits

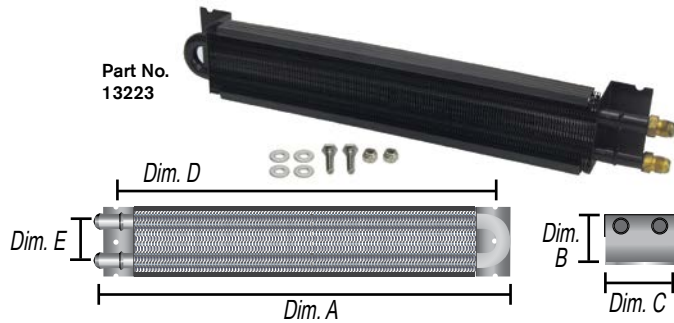

## Frame Rail Cooler Kit

- Prevents heat-related component failure and fluid breakdown
- 1/2" copper tubing expanded into aluminum cooling fins
- -6 AN hose barb inlets
- Extruded plastic cooling fin guards


Cooler Kit Part No.	No. of Passes	Fluid Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Inlet to Inlet)
13223	2	2.5 oz.	2000	-6 AN	13 3/4"	2 3/4"	1 3/4"	11 3/4"	1 1/4"
13221	2	3.25 oz.	2200	-6 AN	17 3/4"	2 3/4"	1 3/4"	15 1/2"	1 1/4"
13225	2	4.5 oz.	2400	-6 AN	24 3/4"	2 3/4"	1 3/4"	22 3/4"	1 1/4"

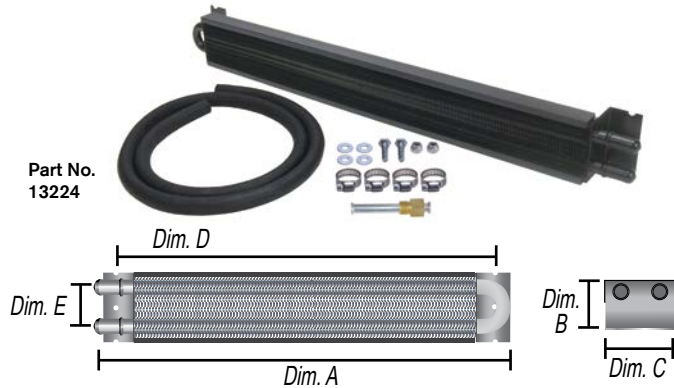

## Transmission Cooler Kits

- Prevents heat-related transmission failure and fluid breakdown
- 1/2" copper tubing expanded into aluminum cooling fins
- 11/32" hose barb inlets
- Extruded plastic cooling fin guards

Trans Cooler Kit Part No.	Repl. Core	No. of Passes	Fluid Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Inlet to Inlet)
13222	13223	2	2.5 oz.	2000	11/32"	12 3/4"	2 3/4"	1 3/4"	11 3/4"	1 1/4"
13220	13321	2	3.25 oz.	2200	11/32"	16 3/4"	2 3/4"	1 3/4"	15 1/2"	1 1/4"
13224	13225	2	4.5 oz.	2400	11/32"	23 3/4"	2 3/4"	1 3/4"	22 3/4"	1 1/4"

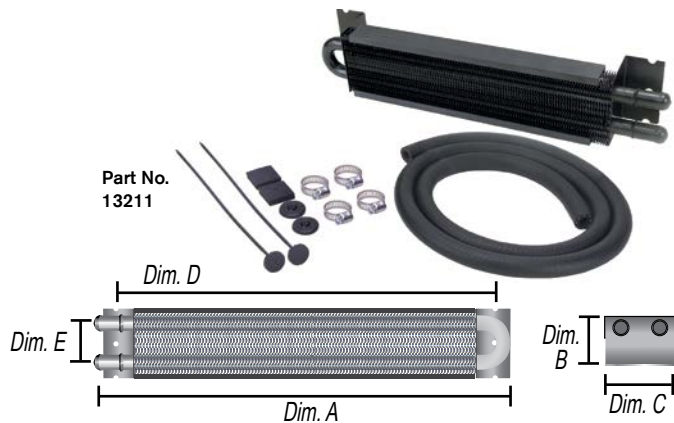

## Power Steering Cooler Kits

- Extends pump & seal life
- Reduces heat-related pump failure
- 1/2" copper tubing expanded into aluminum cooling fins
- 11/32" hose barb inlets

Power Steering Kit Part No.	No. of Passes	Fluid Capacity	BTU	Inlet Size	Dim. A (Width)	Dim. B (Height)	Dim. C (Depth)	Dim. D (Mounting)	Dim. E (Inlet to Inlet)
13210	2	1.5 oz.	1500	11/32" Barb	8 1/8"	2 3/4"	1 3/4"	5 1/4"	1 1/4"
13211	2	2.5 oz.	2000	11/32" Barb	13 3/4"	2 3/4"	1 3/4"	11 3/4"	1 1/4"

# Radiator Cooling Fittings



THE LEADER IN PERFORMANCE COOLING



Barbed Splicer Fittings

## Dodge / Jeep Radiator Adapter

Fits 1960-1997 Dodge Trucks with rubber transmission lines  
Fits 1983-2012 Jeep with 5.2L, 4.2L, 4.0L, 2.5L Engines with rubber transmission lines

Part No.	13028
----------	-------



9/16"-18  
37° JIC Fittings

## Dodge Dakota Radiator Adapter

Fits 1999-2005 Dodge Dakota

Part No.	13030
----------	-------



9/16"-24  
45° SAE Male & Female Fittings

## Dodge Radiator Adapter

Fits 1999-2003 Dodge Trucks, Vans with 5.9L, 5.2L, 3.9L Engines

Part No.	13034
----------	-------



1/4" NPT M/F  
3/8" NPT Male Fittings

## Ford / Mercury Radiator Adapter

Fits 1983-2012 Ford/Mercury Cars, Trucks, Bronco, Expedition, Ranger, Vans w/ 7.5L, 7.3L, 6.9L, 6.6L, 5.8L, 5.4L, 5.0L, 4.9L, 4.7L, 4.6L, 4.2L, 4.0L, 3.8L, 3.0L, 2.9L, 2.8L, 2.5L, 2.3L Engines  
Fits 1983-2007 Mercury Cars w/ 5.8L, 5.0L, 4.6L, 3.8L, 3.0L, 2.5L, 2.3L Engines

Part No.	13014
----------	-------



5/8" Inverted Flare Fittings

## Ford / Lincoln Trucks & SUV's Radiator Adapter

Fits 1998-2012 Ford/Lincoln Trucks & SUV's, Blackwood, Excursion, Expedition, Explorer, Navigator, Ranger with 7.3L, 6.9L, 6.8L, 5.4L, 5.0L, 4.6L, 4.0L, 3.0L, 2.5L Engines

Part No.	13025
----------	-------



1/2"-20  
Inverted Flare Fittings

## Ford / Lincoln / Mercury Radiator Adapter

Fits 1983-2007 Ford/Lincoln/Mercury Cars, Trucks, Blackwood, Bronco, Expedition, Navigator, Ranger, Vans with 7.3L, 6.9L, 5.8L, 5.0L, 4.9L, 4.6L, 4.2L, 2.9L, 2.8L, 2.3L Engines

Part No.	13024
----------	-------



5/8" Inverted Flare Fittings

## GM Radiator Adapter

Fits 1981-2000 Buick w/ 5.7L, 3.8L, 3.3L, 3.1L, 2.5L, 2.4L, 2.3L, 2.2L Engines

Fits 1988-2007 Cadillac Cars, Trucks with 6.2L, 6.0L, 5.7L, 5.3L, 4.9L, 4.6L, 4.5L, 4.1L, 3.0L Engines

Fits 1987-2012 Chevrolet Cars, SUV's, Chevrolet, GM Trucks, Vans w/ 8.1L, 7.4L, 6.5L, 6.0L, 5.7L, 5.3L, 5.0L, 4.8L, 4.3L, 3.8L, 3.4L, 3.2L, 2.4L, 2.3L, 2.2L Engines

Fits 1996-2001 Oldsmobile Bravada with 4.3L Engine

Fits 1983-2005 Pontiac Cars, SUV's with 5.7L, 5.0L, 3.8L, 3.4L, 3.1L, 2.4L, 2.2L, 1.6L Engines

Part No.	13018
----------	-------



Snap in Tube Fitting

## GM Radiator Adapter

Fits 1993-2012 Buick with 4.6L, 4.2L, 3.9L, 3.8L, 3.6L, 3.5L, 3.4L, 3.3L, 3.1L, 2.5L, 2.4L, 2.3L, 2.2L Engines

Fits 1993-2012 Cadillac 6.2L, 6.0L, 5.7L, 5.3L, 4.9L, 4.6L, 4.5L, 4.1L, 3.0L Engines

Fits 2000-2012 Chevrolet Cars, SUV's, Chevrolet, GM Trucks, Vans with 3.8L, 3.4L, 6.0L, 5.3L, 4.8L, 4.3L, 4.2L, 3.7L, 3.5L, 3.4L, 2.9L, 2.8L Engines

Fits 2003-2007 Isuzu SUV's with 4.2L, 5.3L Engines

Fits 2002-2004 Oldsmobile Bravada with 4.2L Engine

Fits 2001-2007 Pontiac with 3.9L, 3.8L, 3.5L, 3.4L, 3.1L Engines

Part No.	13035
----------	-------

## Universal Transmission Line Fittings



5/16" Transmission Cooler Hard Line to 3/8" NPT Hose Barb

Part No.	13031
----------	-------



3/8" Transmission Cooler Hard Line to 3/8" NPT Hose Barb

Part No.	13032
----------	-------



1/2" Transmission Cooler Hard Line to 1/2" NPT Hose Barb

Part No.	13033
----------	-------



Fits most vehicles with 5/16" transmission lines. Includes male and female threads.

Part No.	13004
----------	-------

# Ram Air Fluid Coolers - Quick Guide

Ram Air Cooler Kits							
Size	Part No.	Series	Description	Width	Height	Depth	Page
<b>8" to 9" Width</b>	<b>13309</b>	7000 Tube & Fin Cooler	-6 AN, 4 Pass	8 1/8"	5"	3/4"	29
	<b>13310</b>	7000 Tube & Fin Cooler	-6 AN, 2 Pass	8 1/8"	2 5/8"	1 3/4"	29
<b>10" to 15" Width</b>	<b>33601</b>	9000 Plate & Fin Cooler	1/2" NPT, 5 Row	9 3/4"	4 1/8"	1 1/4"	25
	<b>33602</b>	9000 Plate & Fin Cooler	1/2" NPT, 9 Row	9 3/4"	6 1/4"	1 1/4"	25
	<b>33603</b>	9000 Plate & Fin Cooler	1/2" NPT, 13 Row	9 3/4"	8 7/16"	1 1/4"	25
	<b>33604</b>	9000 Plate & Fin Cooler	1/2" NPT, 17 Row	9 3/4"	10 5/8"	1 1/4"	25
	<b>13605</b>	9000 Tube & Fin Cooler	1/2" NPT, 21 Row	9 3/4"	12 3/16"	1 1/4"	25
	<b>33501</b>	8000 Plate & Fin Cooler	11/32" Barb, 9 Row	11"	5 3/4"	7/8"	27
	<b>33502</b>	8000 Plate & Fin Cooler	11/32" Barb, 13 Row	11"	7 1/4"	7/8"	27
	<b>33503</b>	8000 Plate & Fin Cooler	11/32" Barb, 18 Row	11"	9 1/4"	7/8"	27
	<b>33504</b>	8000 Plate & Fin Cooler	11/32" Barb, 24 Row	11"	12"	7/8"	27
	<b>33523</b>	8000 Plate & Fin Cooler	1/2"-20 Inverted Flare, 18 Row	11"	8 13/16"	7/8"	27
	<b>51078</b>	10000 Stack Plate Cooler	No Fittings, 10 Row	13"	4"	2"	19-20
	<b>51678</b>	10000 Stack Plate Cooler	No Fittings, 16 Row	13"	6"	2"	19-20
	<b>51978</b>	10000 Stack Plate Cooler	No Fittings, 19 Row	13"	7"	2"	19-20
	<b>52578</b>	10000 Stack Plate Cooler	No Fittings, 25 Row	13"	9"	2"	19-20
	<b>53478</b>	10000 Stack Plate Cooler	No Fittings, 34 Row	13"	11"	2"	19-20
	<b>54078</b>	10000 Stack Plate Cooler	No Fittings, 40 Row	13"	13"	2"	19-20
	<b>13311</b>	7000 Tube & Fin Cooler	-6 AN, 4 Pass	13 1/2"	5 1/8"	3/4"	29
	<b>13316</b>	7000 Tube & Fin Cooler	6 Pass	13 1/2"	7 5/8"	3/4"	29
	<b>13317</b>	7000 Tube & Fin Cooler	-6 AN, 8 Pass	13 1/2"	10 1/4"	3/4"	29
	<b>13300</b>	7000 Tube & Fin Cooler	-6 AN, 16 Pass	13 1/2"	10 1/4"	1 3/4"	29
	<b>15300</b>	7000 Tube & Fin Cooler	-8 AN, 16 Pass	13 1/2"	10 1/4"	1 3/4"	29
	<b>13318</b>	7000 Tube & Fin Cooler	-6 AN, 10 Pass	13 1/2"	12 5/8"	3/4"	29
	<b>13223</b>	7000 Tube & Fin Cooler	-6 AN, 2 Pass (Frame Rail Cooler)	13 3/4"	2 1/2"	1 3/4"	34
<b>15301</b>	7000 Tube & Fin Cooler	-8 AN, 8 pass and 8 pass	13 15/16"	10 1/2"	1 3/4"	29	
<b>16" to 25" Width</b>	<b>13312</b>	7000 Tube & Fin Cooler	-6 AN, 4 Pass	17 1/2"	5 1/8"	3/4"	29
	<b>13313</b>	7000 Tube & Fin Cooler	-6 AN, 6 Pass	17 1/2"	7 5/8"	3/4"	29
	<b>13314</b>	7000 Tube & Fin Cooler	-6 AN, 8 Pass	17 1/2"	10 1/4"	3/4"	29
	<b>13315</b>	7000 Tube & Fin Cooler	-6 AN, 10 Pass	17 1/2"	12 5/8"	3/4"	29
	<b>13221</b>	7000 Tube & Fin Cooler	-6 AN, 2 Pass (Frame Rail Cooler)	17 3/4"	2 1/2"	1 3/4"	34
	<b>33633</b>	9500 Plate & Fin Cooler	5/8" Inverted Flare, 13 Row	22 3/4"	9 1/4"	1 1/4"	17
	<b>13225</b>	7000 Tube & Fin Cooler	-6 AN, 2 Pass (Frame Rail Cooler)	24 3/4"	2 1/2"	1 3/4"	34

Ram Air Coolers - Engine Oil Cooler Kits							
Size	Part No.	Series	Description	Width	Height	Depth	Page
<b>10" to 15" Width</b>	<b>15405</b>	9000 Tube & Fin Cooler	13 Row, Sandwich Adapter	10 1/8"	8 7/8"	1 1/4"	25
	<b>15451</b>	9000 Tube & Fin Cooler	13 Row, Spin-On Adapter	10 1/8"	8 7/8"	1 1/4"	25
	<b>15602</b>	10000 Stack Plate Cooler	10 Row, Sandwich Adapter	13"	4 9/16"	2"	22
	<b>15651</b>	10000 Stack Plate Cooler	10 Row, Spin-On Adapter	13"	4 9/16"	2"	22
<b>16" to 25" Width</b>	<b>15502</b>	7000 Tube & Fin Cooler	11 1/32" Barb, 6 Pass, Sandwich Adapter	16 5/8"	7 5/8"	3/4"	31
	<b>15503</b>	7000 Tube & Fin Cooler	11 1/32" Barb, 6 Pass, Sandwich Adapter	16 5/8"	7 5/8"	3/4"	31
	<b>15505</b>	7000 Tube & Fin Cooler	11 1/32" Barb, 6 Pass, Sandwich Adapter	16 5/8"	7 5/8"	3/4"	31



# Ram Air Fluid Coolers - Quick Guide (continued)

Ram Air Coolers - Transmission Oil Cooler Kits							
Size	Part No.	Series	Description	Width	Height	Depth	Page
<b>10" to 15" Width</b>	13611	9000 Tube & Fin Cooler	1/2" NPT, 5 Row	9 3/4"	4 1/8"	1 1/4"	25
	13612	9000 Tube & Fin Cooler	1/2" NPT, 9 Row	9 3/4"	6 1/4"	1 1/4"	25
	13613	9000 Tube & Fin Cooler	1/2" NPT, 13 Row	9 3/4"	8 7/16"	1 1/4"	25
	13614	9000 Tube & Fin Cooler	1/2" NPT, 17 Row	9 3/4"	10 5/8"	1 1/4"	25
	13615	9000 Tube & Fin Cooler	1/2" NPT, 21 Row	9 3/4"	12 13/16"	1 1/4"	25
	13501	8000 Tube & Fin Cooler	11/32" Barb, 9 Row	11"	5 3/4"	7/8"	27
	13502	8000 Tube & Fin Cooler	11/32" Barb, 13 Row	11"	7 1/4"	7/8"	27
	13503	8000 Tube & Fin Cooler	11/32" Barb, 18 Row	11"	9 1/4"	7/8"	27
	13504	8000 Tube & Fin Cooler	11/32" Barb, 24 Row	11"	12"	7/8"	27
	13523	8000 Tube & Fin Cooler	1/2"-20 Inverted Flare, 18 Row	11"	8 13/16"	7/8"	27
	13401	10000 Stack Plate Cooler	3/8" Hose Barb, 10 Row	13"	4 7/16"	2"	22
	<b>NEW</b> 13411	10000 Stack Plate Cooler	3/8" 90° Hose Barb, 10 Row	13"	4 7/16"	2"	22
	12901	6000 Tube & Fin Cooler	11/32" Barb, 4 Pass	12 3/4"	5"	3/4"	31
	13402	10000 Stack Plate Cooler	3/8" Hose Barb, 16 Row	13"	6 7/16"	2"	22
	<b>NEW</b> 13412	10000 Stack Plate Cooler	3/8" 90° Hose Barb, 16 Row	13"	6 7/16"	2"	22
	13403	10000 Stack Plate Cooler	3/8" Hose Barb, 19 Row	13"	7 5/16"	2"	22
	<b>NEW</b> 13413	10000 Stack Plate Cooler	3/8" 90° Hose Barb, 19 Row	13"	7 5/16"	2"	22
	12906	6000 Tube & Fin Cooler	11/32" Barb, 6 Pass	12 3/4"	7 1/2"	3/4"	31
	13101	7000 Tube & Fin Cooler	11/32" Barb, 4 Pass	13 1/2"	5 1/8"	3/4"	30
	13306	7000 Tube & Fin Cooler	-6 AN, 6 Pass	13 1/2"	7 5/8"	3/4"	30
	13106	7000 Tube & Fin Cooler	11/32" Barb, 6 Pass	13 1/2"	7 5/8"	3/4"	30
	13107	7000 Tube & Fin Cooler	11/32" Barb, 8 Pass	13 1/2"	10 1/4"	3/4"	30
	13108	7000 Tube & Fin Cooler	11/32" Barb, 10 Pass	13 1/2"	12 5/8"	3/4"	30
	13222	7000 Tube & Fin Cooler	11/32" Barb, 2 Pass (Frame Rail Cooler)	13 3/4"	2 1/2"	1 3/4"	34
12902	6000 Tube & Fin Cooler	11/32" Barb, 4 Pass	15 1/4"	5"	3/4"	31	
12903	6000 Tube & Fin Cooler	11/32" Barb, 6 Pass	15 1/4"	7 1/2"	3/4"	31	
12904	6000 Tube & Fin Cooler	11/32" Barb, 8 Pass	15 1/4"	10"	3/4"	31	
<b>16" to 25" Width</b>	13102	7000 Tube & Fin Cooler	11/32" Barb, 4 Pass	17 1/2"	5 1/8"	3/4"	30
	13103	7000 Tube & Fin Cooler	11/32" Barb, 6 Pass	17 1/2"	7 5/8"	3/4"	30
	13303	7000 Tube & Fin Cooler	-6 AN, 6 Pass	17 1/2"	7 5/8"	3/4"	30
	13104	7000 Tube & Fin Cooler	11/32" Barb, 8 Pass	17 1/2"	10 1/4"	3/4"	30
	13304	7000 Tube & Fin Cooler	-6 AN, 8 Pass	17 1/2"	10 1/4"	3/4"	30
	13105	7000 Tube & Fin Cooler	11/32" Barb, 10 Pass	17 1/2"	12 5/8"	3/4"	30
	13220	7000 Tube & Fin Cooler	11/32" Barb, 2 Pass (Frame Rail Cooler)	17 3/4"	2 1/2"	1 3/4"	34
	13633	9500 Plate & Fin Cooler	5/8" Inverted Flare, 13 Row	22 3/4"	9 1/4"	1 1/4"	17
	13224	7000 Tube & Fin Cooler	11/32" Barb, 2 Pass (Frame Rail Cooler)	24 3/4"	2 1/2"	1 3/4"	34

Ram Air Coolers - Power Steering Kits							
Size	Part No.	Series	Description	Width	Height	Depth	Page
<b>8" to 9" Width</b>	13210	7000 Tube & Fin Cooler	11/32" Barb, 2 Pass (Frame Rail Cooler)	8 1/8"	1 3/4"	1 3/4"	34
	13212	7000 Tube & Fin Cooler	11/32" Barb, 4 Pass	8 1/8"	5 1/8"	3/4"	31
	13213	7000 Tube & Fin Cooler	11/32" Barb, 2 Pass	8 1/8"	2 5/8"	3/4"	31
<b>10" to 15" Width</b>	13215	8000 Plate & Fin Cooler	11/32" Barb, 9 Row	11"	5 3/4"	7/8"	29
	13200	7000 Tube & Fin Cooler	11/32" Barb, 2 Pass	12 3/4"	2 5/8"	3/4"	31
	13211	7000 Tube & Fin Cooler	11/32" Barb, 2 Pass (Frame Rail Cooler)	13 3/4"	1 3/4"	1 3/4"	34



THE LEADER IN PERFORMANCE COOLING

# Black Anodized Aluminum Fittings

## Female AN Swivel Hose Barb Fittings



Part No.	Description	U/M
98200	-6 AN Female x 3/8" Hose Barb	Ea.
98201	-8 AN Female x 3/8" Hose Barb	Ea.
98202	-8 AN Female x 1/2" Hose Barb	Ea.
98203	-10 AN Female x 1/2" Hose Barb	Ea.

## Male AN Hose Barb Fittings



Part No.	Description	U/M
98204	-6 AN Male x 3/8" Hose Barb	Ea.
98205	-8 AN Male x 1/2" Hose Barb	Ea.

## 7/8-14 O-Ring to Hose Barb Fittings



Part No.	Description	U/M
98206	7/8 -14 UNF Male o-ring x 3/8" Hose Barb	Ea.
98208	7/8 -14 UNF Male o-ring x 1/2" Hose Barb	Ea.

## Straight NPT Hose Barb Fittings



Part No.	Description	U/M
98100	1/4" NPT Male x 3/8" Hose Barb	Ea.
98101	3/8" NPT Male x 3/8" Hose Barb	Ea.
98102	3/8" NPT Male x 1/2" Hose Barb	Ea.
98103	1/2" NPT Male x 1/2" Hose Barb	Ea.

## Male Adapter Fittings-AN x 7/8-14 O-ring



Part No.	Description	U/M
59006	-6 AN Male x 7/8"-14 UNF o-ring	Ea.
59008	-8 AN Male x 7/8"-14 UNF o-ring	Ea.
59010	-10 AN Male x 7/8"-14 UNF o-ring	Ea.
59012	-12 AN Male x 7/8"-14 UNF o-ring	Ea.
59106	-6 AN x 5/8"-18 o-ring	Ea.
59108	-8 AN x 5/8"-18 o-ring	Ea.

## Male Adapter Fittings-AN x NPT



Part No.	Description	U/M
59206	-6AN Male x 3/8" NPT Male	Ea.
59208	-8AN Male x 3/8" NPT Male	Ea.
59210	-10AN Male x 3/8" NPT Male	Ea.
59306	-6AN Male x 1/2" NPT Male	Ea.
59308	-8AN Male x 1/2" NPT Male	Ea.
59310	-10AN Male x 1/2" NPT Male	Ea.

• 6061 aluminum

• Black anodized finish

## Male Coupler Fittings



Part No.	Description	U/M
35799	-10 AN UNF o-ring x -10 AN UNF o-ring Coupler Fitting	Ea.

## 90° Swivel Fittings



Part No.	Description	U/M
59506	7/8 -14 UNF o-ring to -6 AN male 90° swivel	Ea.
59508	7/8 -14 UNF o-ring to -8 AN male 90° swivel	Ea.
59510	7/8-14 UNF o-ring to -10 AN male 90° swivel	Ea.

## 90° Swivel Fittings



Part No.	Description	U/M
59406	7/8-14 UNF o-ring to 3/8" hose barb male 90° swivel	Ea.
59408	7/8-14 UNF o-ring to 1/2" hose barb male 90° swivel	Ea.

## 90° Swivel Fittings



Part No.	Description	U/M
59606	3/8" NPT to AN6 male 90° swivel	Ea.
59608	3/8" NPT to AN8 male 90° swivel	Ea.
59706	1/2" NPT to AN6 male 90° swivel	Ea.
59708	1/2" NPT to AN8 male 90° swivel	Ea.

## Compression Fittings-Tube to AN



Part No.	Description	U/M
13044	Compression Fitting 5/16" Tube to -6AN Male	Ea.
13045	Compression Fitting 3/8" Tube to -6AN Male	Ea.
13046	Compression Fitting 1/2" Tube to -8AN Male	Ea.

## Compression Fittings-Tube to Hose Barb



Part No.	Description	U/M
13041	Compression Fitting 5/16" Tube to 3/8" Hose Barb	Ea.
13042	Compression Fitting 3/8" Tube to 3/8" Hose Barb	Ea.
13043	Compression Fitting 1/2" Tube to 1/2" Hose Barb	Ea.

# Fittings, Accessories, Hose & Mount Kits



## Straight NPT Hose Barb Fittings



Part No.	Description	U/M
98104	1/4" Female x 3/8" Barb	Ea.
98105	3/8" Female x 3/8" Barb	Ea.
98106	1/2" Female x 1/2" Barb	Ea.

## 90° Hose Barb Fittings



Part No.	Description	U/M
98233	3/8" NPT Male x 3/8" Barb	Ea.
98234	3/8" NPT Male x 1/2" Barb	Ea.
98244	1/2" NPT Male x 1/2" Barb	Ea.

## NPT Reducer Bushings



Part No.	Description	U/M
98450	3/8" Male x 1/8" Female	Ea.
98451	1/2" Male x 1/8" Female	Ea.
98452	1/2" Male x 3/8" Female	Ea.

## 90° NPT Fittings



Part No.	Description	U/M
98333	3/8" NPT Female x 3/8" NPT Male	Ea.
98344	1/2" NPT Female x 1/2" NPT Male	Ea.

## Filter Nipples



Part No.	Description	U/M
98020	3/4"-16	Ea.
98021	13/16"-16	Ea.

## Zinc Radiator Anode



Part No.	Description	U/M
98000	Fits radiator with 1/4" NPT drain petcock	Ea.

## Replacement Hose

- Transmission or engine oil hose
- High temperature OEM spec hose
- 300 p.s.i. burst rating



Part #  
13003



Part #  
13007

Part No.	Hose ID	Length	Application
13003	11/32"	4 ft.	Transmission
13007	11/32"	25 ft.	Transmission
13016	3/8"	5 ft.	Transmission
13017	3/8"	25 ft.	Transmission
15700	1/2"	10 ft.	Engine
15701	1/2"	5 ft.	Engine
15740	1/2"	8 ft.	Engine
15799	1/2"	25 ft.	Engine

## Insta-Mount Kit

- Universal mounting kit for coolers & electric fans



Part #  
13001

## Rigid Mount Kit

- 6 7/8" universal bendable metal mounting brackets



Part #  
13002

## Hose Clamps

- Universal hose clamps
- Fit from 5/16-1/2" hose



Part #  
13008







**THE LEADER IN PERFORMANCE COOLING**

# Engine Sandwich Adapters

A sandwich adapter provides external oil lines to allow the addition of an engine oil cooler. It installs between the stock engine oil filter landing and the oil filter. This allows for engine oil cooling power without relocating stock engine oil filter.

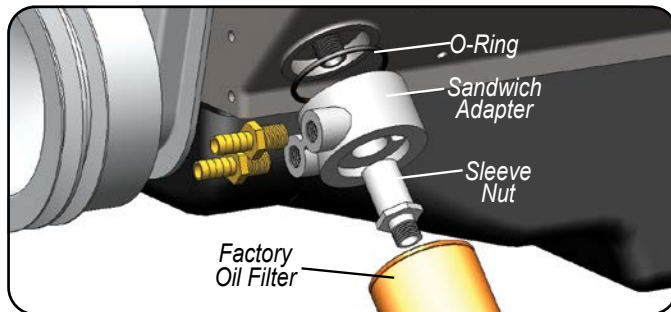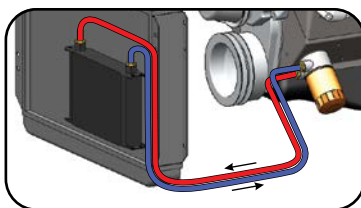

- **Cast from high quality aluminum**
- **Four designs to fit most applications**
- **Maintains factory equivalent oil filter**



## Thermostatic

This universal kit is manufactured of high-quality die-cast aluminum and includes an 180°F thermostatic sandwich adapter with 3/8" NPT ports and an o-ring diameter of 2 3/4". Kit includes sleeve nuts and hose barb fittings.



## Thermostatic (GM Applications)

High quality die-cast aluminum thermostatic sandwich adapter with 1/2" NPT ports and an o-ring diameter of 3 1/2". It installs between the stock engine oil filter landing and the oil filter. Stock filter is retained. Kit includes sleeve nut and hose barb fittings.



## Low-Profile

At only 1" thick, this high quality aluminum low profile sandwich adapter features 3/8" NPT ports and pressure relief valve and provides external oil lines to run an engine oil cooler while dropping the factory oil filter only 1" lower than stock.



## Non-Thermostatic

This sandwich adapter was designed to one give a non-thermostatic option to consumers with high performance engines with 2 3/4" filter landings, and two to fit import vehicles with 2 1/2" diameter filter landings. Stock filter is retained. Kit includes sleeve nuts and hose barb fittings.





Complete Kit Part No.	Kit Part No.	Engine Thread Sizes	O-Ring Dia.	Thickness	Ports
<b>Thermostatic</b>					
15702	25702	3/4"-16, 13/16"-16, 18x1.5mm, 20x1.5mm, 22x1.5mm	2 1/2" to 2 3/4"	1 3/4"	3/8" NPT
----	25782		2 3/4" to 3 1/2"	1 3/4" or 2 1/8"	3/8" NPT
----	25730	3/4"-16	2 1/2" to 2 3/4"	1 3/4"	3/8" NPT
----	25731	13/16"-16	2 3/4" to 3 1/2"	1 3/4" or 2 1/8"	3/8" NPT
----	25732	20 x 1.5mm	2 1/2" to 2 3/4"	1 3/4"	3/8" NPT
----	25733	18 x 1.5mm	2 1/2" to 2 3/4"	1 3/4"	3/8" NPT
----	25734	22 x 1.5mm	2 1/2" to 2 3/4"	1 3/4"	3/8" NPT
<b>Thermostatic (GM Applications Only)</b>					
15720	25720	13/16"-16	3 1/2"	2 1/4"	1/2" NPT
<b>Non-Thermostatic</b>					
15735	----	3/4"-16, 13/16"-16, 18x1.5mm, 20x1.5mm, 22x1.5mm	2 3/4" to 3 1/2"	1 3/4"	1/2" NPT
<b>Low Profile with pressure relief</b>					
----	25770	3/4"-16	2 1/2" to 2 3/4"	1"	3/8" NPT
----	25771	13/16"-16	2 1/2" to 2 3/4"	1"	3/8" NPT
----	25772	20 x 1.5mm	2 1/2" to 2 3/4"	1"	3/8" NPT
----	25773	18 x 1.5mm	2 1/2" to 2 3/4"	1"	3/8" NPT
----	25774	22 x 1.5mm	2 1/2" to 2 3/4"	1"	3/8" NPT
----	25783	3/4"-16, 13/16"-16, 18x1.5mm, 20x1.5mm, 22x1.5mm	2 1/2" to 2 3/4"	1"	3/8" NPT

# Engine Spin-On Adapters



THE LEADER IN PERFORMANCE COOLING

Spin-on adapters provide external oil lines to allow the addition of an engine oil cooler and/or remote filter mount, installing at the stock engine oil filter location. With an attractive, billet style look and ultra-bright, polished appearance it adds style and function.

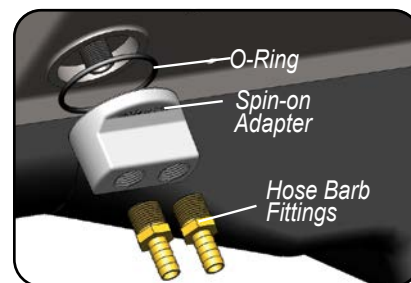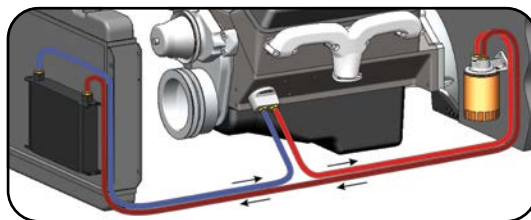

- Quick and easy installation
- Relocate filter mounting for easier access
- Custom applications available

## Ports-up Standard Series

- Ultra bright finish
- New Billet-style design
- Available in 6 numbers to fit all applications
- 1/2" NPT ports



## Ports-up Premium Series

- Black powder coated finish
- New Billet-style design
- Available in 6 numbers to fit all applications
- -10 AN / 7/8"-14 O-Ring ports



## Ports Left / Right Series

- Ultra bright finish
- 1/2" NPT ports



Style	Std. Series Part No.	Ports	Premium Series Part No.	Ports	Engine Thread Sizes	O-Ring Dia.
Ports-up	15747	1/2" NPT	35747	-10 AN o-ring	3/4"-16, 13/16"-16, 18x1.5mm, 20x1.5mm, 22x1.5mm	2 1/2", 2 3/4", 3 1/2"
Ports-up	15703	1/2" NPT	----	-10 AN o-ring	3/4"-16	2 1/2", 2 3/4"
Ports-up	15704	1/2" NPT	----	-10 AN o-ring	18 x 1.5mm	2 1/2", 2 3/4"
Ports-up	15705	1/2" NPT	----	-10 AN o-ring	13/16"-16	2 1/2", 2 3/4", 3 1/2"
Ports-up	15706	1/2" NPT	----	-10 AN o-ring	20 x 1.5mm	2 1/2", 2 3/4"
Ports-up	15724	1/2" NPT	----	-10 AN o-ring	22 x 1.5mm	2 1/2", 2 3/4"
Ports Left / Right	15746	1/2" NPT	----	----	3/4"-16	2 1/2", 2 3/4"



Part No.  
35761

Mount Part No.	Inlet/Outlet Ports	Filter Landing
<b>NEW</b> 35761	13/16"-16	3 1/2"
98003	Replacement o-ring and gasket	

## Billet Aluminum GM V-8 Spin-On Oil Filter Adapter

- Fits all 1956-1967 SB & BB V8's (except Chevy II) with canister style oil filter
- Converts factory canister style oil filter to a spin-on type oil filter
- Requires factory GM oil bypass
- 6061 Aluminum / Black Anodized
- Uses Fram PH5, PH30 or equivalent oil filters



Part No.  
15760

Mount Part No.	Inlet/Outlet Ports
35760	1/2" NPT
35762	7/8"-14 ORB
98004	Replacement o-ring Set

## Billet Aluminum GM V-8 Bolt-On Oil Filter Adapter

- Fits all 1956-1991 SB & BB V8's
- Allows factory oil filter to be moved to a remote location
- Bolts directly to engine block replacing factory oil bypass
- Finned aluminum design with 1/2" NPT or 7/8-14 UNF ports
- 6061 Aluminum / Black Anodized



THE LEADER IN PERFORMANCE COOLING


# LS Engine Adapters

Part No. 35621



## LS THERMOSTATIC BYPASS ADAPTER

- Low profile designs maximizes header clearance
- Clears most long tube headers for LS swaps
- 6061 Billet Aluminum
- -10 AN ORB Ports for Maximum Flow
- Black anodized
- Flows up to 20 gallons per minute
- Rated at 200 psi
- Bolts and 1/8" NPT plugs included
- Viton O-Rings

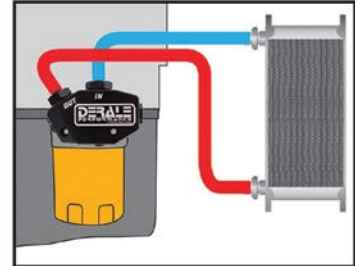

Bypass engine oil cooler during engine warm up with built-in 180°F Thermostat

\*NOTE: Fittings and temperature sensor not included.

## LS ENGINE OIL COOLER ADAPTER



Part No. 35611

Engine side block-off port



## LS ENGINE BLOCK-OFF ADAPTER



Part No. 35601

Engine side block-off port



Block-Off Adapter features 1/8" NPT accessory port

## LS & LT BILLET OIL GALLEY PLUGS

**DON'T TRUST YOUR ENGINE TO A PIECE OF PLASTIC!**

### GM LS ENGINES

Fits LS Oil Galley Plug for all General Motors Gen III, Gen IV LS series engines & all Vortec Truck Engines.



- Direct replacement for plastic OEM Barbell Plug
- Improves oil flow & pressure
- Design to reduce fluid restriction

### GM LT ENGINES

Fits LT oil galley plug for all General Motors Gen V LT family engines (LT1, LT2, LT4, LT5), Gen V 5.3L V8 truck engines (L83, L8B, L82, L84), Gen V 6.2L V8 truck engines (L86/L87), Gen V 6.6L V8 truck engines (L8T)



**NEW**

Part No.	Description
35603	GM LS Engines
35605	GM LT Engines






# Engine Oil Filter Relocation Kits



## Features and Benefits


- Allows oil filter to be moved to a more convenient location
- Faster and easier filter changes
- Ideal for engine swaps
- Increases oil capacity
- Cast from high quality aluminum
- 10' length of 1/2" OEM-spec hose included
- Filter mount uses Fram PH8A or equivalent
- Complete hardware kit included

### Spin-On Adapter - Ports Up (Universal) Filter Mount - Ports Up

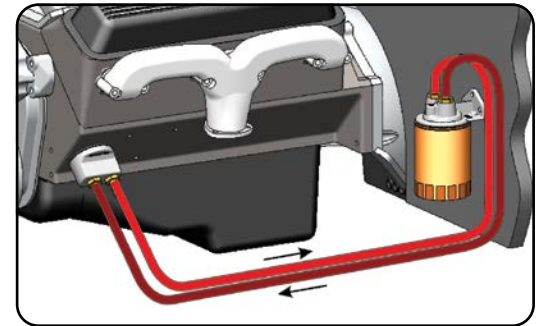

Part No.	Engine Thread Size	Filter Thread Size	Filter Landing	Inlet/Outlet Ports
<b>Single Mount - Ports Up</b>				
15715	3/4"-16	3/4"-16	2 1/2", 2 3/4"	1/2" NPT
15716	13/16"-16	3/4"-16	2 1/2", 2 3/4"	1/2" NPT
15717	18 x 1.5mm	3/4"-16	2 1/2", 2 3/4"	1/2" NPT
15718	20 x 1.5mm	3/4"-16	2 1/2", 2 3/4"	1/2" NPT
15725	22 x 1.5mm	3/4"-16	2 1/2", 2 3/4"	1/2" NPT
15748	3/4"-16, 13/16"-16, 18 x 1.5mm, 20 x 1.5mm, 22 x 1.5mm	3/4"-16	2 1/2", 2 3/4"	1/2" NPT

### Spin-On Adapter - Side Ports (Universal) Filter Mount - Side Ports

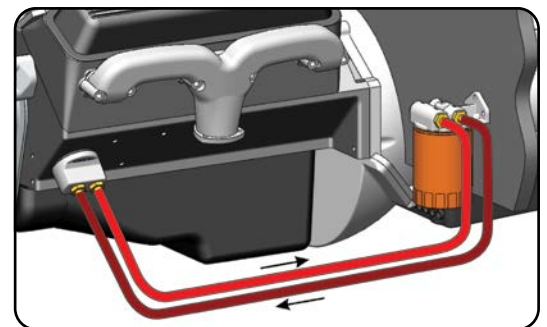

Part No.	Engine Thread Size	Filter Thread Size	Filter Landing	Inlet/Outlet Ports
15780	3/4"-16, 13/16"-16, 18 x 1.5mm, 20 x 1.5mm, 22 x 1.5mm	3/4"-16	2 1/2", 2 3/4"	1/2" NPT



THE LEADER IN PERFORMANCE COOLING

# Remote Filter Mount Kits



**Reverse**  
FLOW DESIGN



## Premium Series Filter Mounts

- Cast aluminum Billet-look
- Can be rotated 180° to reverse flow directions
- Designed to fit 2 1/2" to 3 1/2" oil filter
- Removable 3 hole mounting bracket
- Black powder coated finish
- -10 AN / 7/8"-14 O-Ring ports

## Premium Series Single Filter Mounts - Ports Up



Part No.  
35708

Ports Up Part No.	Filter Thread Size	Filter Landing	Inlet/Outlet Ports
35708	3/4"-16	2 1/2" to 3 1/2"	-10 AN / 7/8"-14 o-ring
35728	13/16"-16	2 1/2" to 3 1/2"	-10 AN / 7/8"-14 o-ring



Part No.  
35709

## Premium Series Single Filter Mounts - Side Ports

Side Ports Part No.	Filter Thread Size	Filter Landing	Inlet/Outlet Ports
35709	3/4"-16	2 1/2" to 3 1/2"	-10 AN / 7/8"-14 o-ring
35729	13/16"-16	2 1/2" to 3 1/2"	-10 AN / 7/8"-14 o-ring



Part No.  
35707

## Premium Series Dual Filter Mounts - Side Ports

Side Ports Part No.	Filter Thread Size	Filter Landing	Inlet/Outlet Ports
35707	3/4"-16	2 1/2" to 3 1/2"	-10 AN / 7/8"-14 o-ring
35727	13/16"-16	2 1/2" to 3 1/2"	-10 AN / 7/8"-14 o-ring
35799	-10 AN o-ring x -10 AN o-ring Coupler Fitting		



## Standard Series Filter Mounts

- Cast aluminum
- 3 Bolt heavy duty flange
- Designed to fit 2-1/2" to 2-3/4" oil filter
- Perfect for engine, transmission and fluid filtration



Part No.  
15709



Part No.  
13005

## Single - Side Ports

Kit Part No.	Mount Only Part No.	Filter Threads	Filter Landing	Inlet/Outlet Ports	Repl. Nipple
13049	25049	3/4"-16	2 1/2" to 2 3/4"	3/8" NPT	98020
15709	25709	3/4"-16	2 1/2" to 2 3/4"	1/2" NPT	98020
15729	25729	13/16"-16	2 1/2" to 2 3/4"	1/2" NPT	98021

## Single - Ports Up

Kit Part No.	Mount Only Part No.	Filter Threads	Filter Landing	Inlet/Outlet Ports	Repl. Nipple
-----	25044	3/4"-16	2 1/2" to 2 3/4"	1/4" NPT	98020
13005	25005	3/4"-16	2 1/2" to 2 3/4"	3/8" NPT	98020
15708	25708	3/4"-16	2 1/2" to 2 3/4"	1/2" NPT	98020
15728	25728	13/16"-16	2 1/2" to 2 3/4"	1/2" NPT	98021



Part No.  
13090




Premium kits include the Derale temperature gauge kit

## Transmission Filter Kits

Our universal remote transmission filter kits enable quick and efficient filter changes and filter out contaminants that pass through OE-screen type filters. Another benefit is the increased fluid capacity which effectively cools fluid temperatures moderately and help extend the life of the transmission.

- Extends transmission life
- Increase fluid capacity for added cooling
- Higher efficiency than screen type filters
- Universal - Fits all automatic transmissions

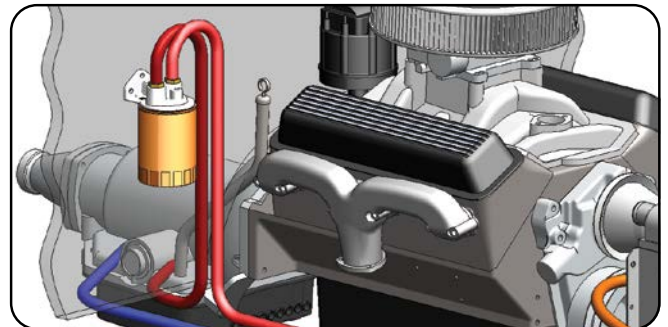

### FILTER SPECS:

- Thread Size: 3/4"-16
- Filter Size: 3 1/2" OD x 3 1/8" Tall
- Burst pressure increases from 235 p.s.i. to 350 p.s.i.

Part No.	Description	Filter Thread Size	Filter Landing	Inlet/Outlet Ports	Filter Dimensions
13090	Standard Kit	3/4"-16	2 1/2" to 2 3/4"	3/8" NPT	3 1/2" O.D. x 3 1/8"
13091	Premium Kit	3/4"-16	2 1/2" to 2 3/4"	3/8" NPT	3 1/2" O.D. x 3 1/8"
13092	Replacement Filter	3/4"-16	-----	-----	3 1/2" O.D. x 3 1/8"





THE LEADER IN PERFORMANCE COOLING


# Transmission Cooling Pans



## Features and Benefits

- Reduces fluid temperatures
- Increases fluid capacity
- Precision TIG welded
- Two stage heat-dissipating black finish
- 1/8" NPT temperature sender port
- Drain plug features increased magnet strength & reusable rubber/steel washer
- Applications to fit Ford, Dodge/Chrysler and GM vehicles
- Uses OEM filter
- Includes gasket

## Dimensions

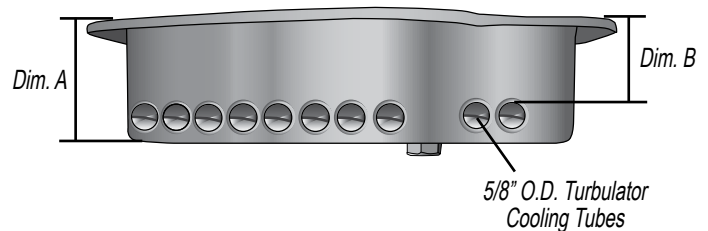


Built-in airflow cooling tubes make the Derale Transmission Cooling Pans the easiest way to combat excessive fluid temperatures. Cooling pans bolt right on with minimal or no modifications to stock chassis.



**Ford • Dodge/Chrysler • GM**

- ✓ 5/8" O.D. AIRFLOW COOLING TUBES
- ✓ EXTRA FLUID CAPACITY
- ✓ HEAT DISSIPATING BLACK FINISH
- ✓ RARE EARTH MAGNETIC DRAIN PLUG
- ✓ BUILT-IN 1/8" TEMP SENDER PORT

**Airflow tubes feature built-in turbulators for maximum heat dissipation**

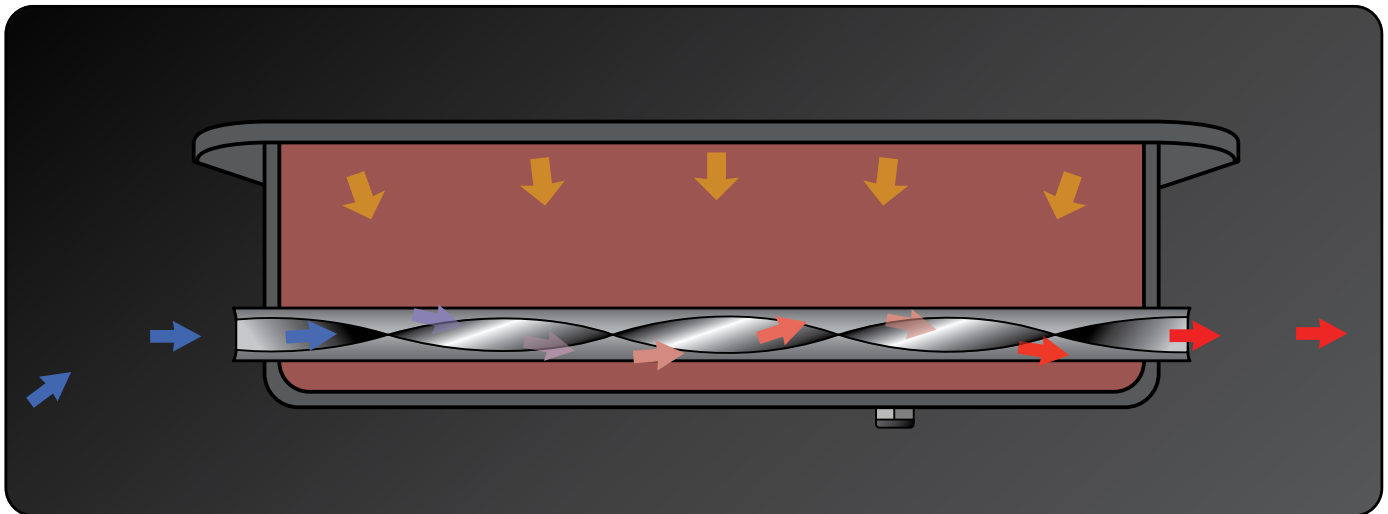

Derale Performance Transmission Cooling Pans feature 5/8" integrated airflow tubes that utilize natural airflow passing under the vehicle to cool transmission fluid temperatures.

**1/8" NPT Temp Port**



1/8" NPT Temp port allows for easy installation of temperature sending unit.



**Magnetic Drain Plug**



- 1/2"-20 Threads
- Increased magnet strength
- Rubber/Steel washer



**THE LEADER IN PERFORMANCE COOLING**



### ***Chevy / GM Turbo 350***

- Fits most GM Turbo 350 1968-1986 applications

Application	Part No.	Capacity	Dim. A Pan Depth	Dim. B Tube Depth
GM Turbo 350	<b>14200</b>	2 qts	3 1/4"	2 3/8"



### ***Chevy / GM Turbo 400***

- Standard: Fits most GM Turbo 400 1966-1990 applications
- Deep Pan: Fits most GM Turbo 400 1978-1990 applications

Application	Part No.	Capacity	Dim. A Pan Depth	Dim. B Tube Depth
GM Turbo 400 Standard Pan	<b>14201</b>	1 qt 17 oz	2 7/8"	2"
GM Turbo 400 Deep Pan	<b>14202</b>	Deep OE Pan to Deep Pan - 1 qt. 3 oz. Std. OE Pan to Deep Pan - 3 qts. 8 oz.	4"	3 1/16"



### ***Chevy / GM 4L80E***

- Fits most GM 4L80E 1991-2008 applications

Application	Part No.	Capacity	Dim. A Pan Depth	Dim. B Tube Depth
GM 4L80E	<b>14207</b>	4 qts. 16 oz.	4 1/16"	2 3/4"



### ***Chevy / GM 700R4 & 4L60E***

- Fits most GM 700R4 & 4L60E 1992-1999 applications

Application	Part No.	Capacity	Dim. A Pan Depth	Dim. B Tube Depth
GM 700R4, 4L60E	<b>14204</b>	2 qts. 4 oz.	3 5/8"	2 1/2"





## Ford E40D, 4R100, 5R110 & 5R110W

- Fits most E40D, 4R100, 5R110 & 5R110W 1989-2010 applications

Application	Part No.	Capacity	Dim. A Pan Depth	Dim. B Tube Depth
Ford E40D, 4R100, 5R110 & 5R110W	14208	4R100 - 7 qts. 30 oz. 5R110 - 7 qts. 10 oz.	6 1/8"	4 3/8"



## Dodge / Chrysler A727, A904, A518 & A618

- Fits most Dodge/Chrysler A727, A904, A518 & A618 1989-2010 applications

Application	Part No.	Capacity	Dim. A Pan Depth	Dim. B Tube Depth
Dodge A727, A904, A518 & A618	14210	Up to 5 qts. 16 oz.	4 1/2"	3 5/8"

# Transmission Cooling Pan Accessories

## Filter Pickup Tube



**Application:**  
GM TH400 Deep pan - Extends filter for use on deep transmission pans.

Part No.	14002
----------	-------

## Universal Drain Plug Kit



- 1/8" NPT Plug
- Perfect for temp sending units

Part No.	13010
----------	-------

## Deep Pan Filter Extender



**Application:**  
Dodge A727, A904, A518 & A618 - Extends filter for use on deep transmission pans.

Part No.	14010
----------	-------

## Magnetic Drain Plug Kit



- 1/2"-20 Threads
- Increased magnet strength
- Rubber/Steel washer

Part No.	14000
----------	-------



THE LEADER IN PERFORMANCE COOLING

# High Output Brushless Aluminum Powerpacks



## Features and Benefits

- **Powerful, primary cooling fans eliminate fuel & horsepower-robbing belt driven fans**
- **Aluminum finish can be polished, painted or anodized**
- **Longer life: Up to 40,000 hours**
- **Reduced fan Noise: Patented “Sine Wave Technology”**
- **Integrated PWM Control: Pulse Width Modulation controls fan speed from 0-100% to maintain Temps.**
- **Increases efficiency: Lower power consumption & reduced internal operating temperatures**
- **Multiple mounting options**
- **Includes illustrated instructions & mounting hardware**

• **State of the art Brushless Technology**




• **Tig Welded aluminum shroud**



• **Plug-in wire harness**



## Dimensions

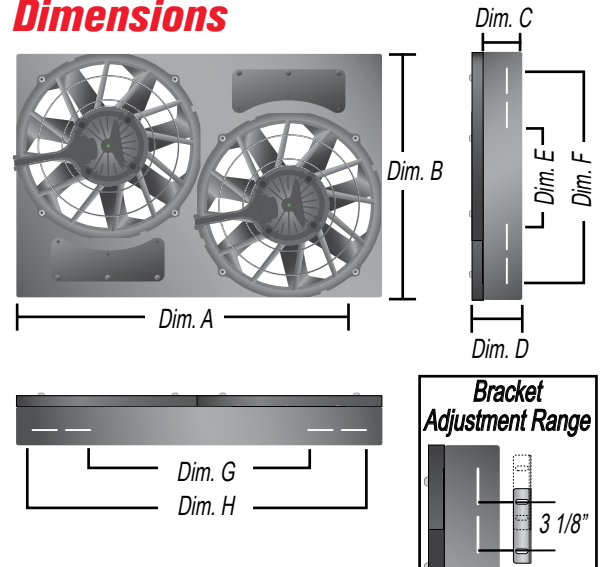



## B17 Single Powerpack NEW

- Features a 17" Fan with a High output motor
- Increased CFM over brushed DC Fans (2800 CFM)
- PWM Sensor to maintain temperatures at 185°F, 195°F or 215°F
- Lower power consumption and reduced internal operating temperatures
- Puller (engine side) applications only
- Sealed waterproof and dustproof, IP6K9K Certified
- Complete Installation kit

Part No.  
67922

PWM Temp Sensor and Harness



Hardware kit



- 185 PN: PWM Sensor maintains Temps at 185°F
- 195 PN: PWM Sensor maintains Temps at 195°F
- 215 PN: PWM Sensor maintains Temps at 215°F

185°F PWM Sensor	195°F PWM Sensor	215°F PWM Sensor	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)	Dim G. (Mounting)	Dim H. (Mounting)
67922-185	67922-195	67922-215	2800	35	22 1/4"	17 5/8"	2 13/16"	3 1/2"	9 3/8"	15 1/4"	14"	20"
67923-185	67923-195	67923-215	2800	35	21"	17 1/8"	2 13/16"	3 1/2"	9 1/8"	14 5/8"	13"	18 1/2"



## B12 Dual Powerpack NEW


- Features two 12" Fans with High output motors
- Increased CFM over brushed DC Fans (4400 CFM)
- PWM Sensor to maintain temperatures at 185°F, 195°F or 215°F
- Lower power consumption and reduced internal operating temperatures
- Puller (engine side) applications only
- Sealed waterproof and dustproof, IP6K9K Certified
- Air pressure relief vents

Part No.  
67942

PWM Temp Sensor and Harness



Hardware kit



- 185 PN: PWM Sensor maintains Temps at 185°F
- 195 PN: PWM Sensor maintains Temps at 195°F
- 215 PN: PWM Sensor maintains Temps at 215°F

185°F PWM Sensor	195°F PWM Sensor	215°F PWM Sensor	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)	Dim G. (Mounting)	Dim H. (Mounting)
67926-185	67926-195	67926-215	4400	56	26"	17 1/8"	2 13/16"	3 1/2"	9"	14 3/4"	17 3/4"	23 3/4"
67938-185	67938-195	67938-215	4400	56	28 1/8"	17"	2 13/16"	3 1/2"	8 3/4"	14 3/4"	20"	25 7/8"
67942-185	67942-195	67942-215	4400	56	26"	18"	2 13/16"	3 1/2"	9 3/4"	15 3/4"	17 3/4"	23 3/4"





THE LEADER IN PERFORMANCE COOLING

# High Output Single Rad Fan Aluminum Powerpacks






## Features and Benefits

- Powerful, primary cooling fans eliminate fuel & horsepower-robbing belt driven fan
- Aircraft-quality natural satin aluminum finish can be polished, painted or anodized
- Increases fuel economy
- Multiple mounting options
- Includes illustrated instructions and mounting hardware


Fan Controllers sold separately, see page 74-76.

## Dimensions

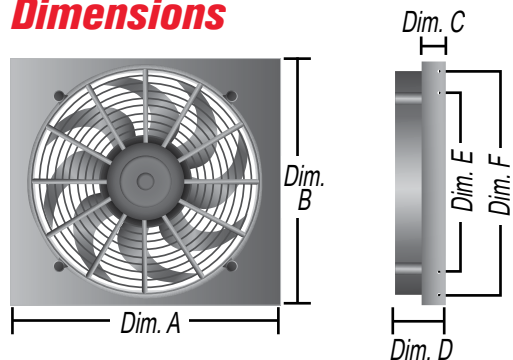



Hardware kit



+ Optional PWM - Includes a full PWM Controller, installation hardware and instructions.

See page 66 for details on how it works.



## A17 Single Powerpack


- High output 265-watt two speed motor
- Puller (engine side) applications only

Part No. 16819

Part No.	With PWM Controller*	Repl. Fan	CFM* High/Low	Amp Draw High/Low	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)	Dim G. (Mounting)	Dim H. (Mounting)
16816 <b>NEW</b> → 66816		16917	2400 / 1800	23.5 / 17.4	16 3/4"	17 5/8"	1 1/8"	3"	8 7/8"	13 1/8"	11"	15"
16818	66818	16917	2400 / 1800	23.5 / 17.4	18"	18"	1 1/8"	3"	10 1/8"	14 1/2"	11 1/8"	15 1/2"
16819	66819	16917	2400 / 1800	23.5 / 17.4	18 3/4"	17 5/8"	1 1/8"	3"	10 3/4"	15"	11"	15 1/4"
16821	66821	16917	2400 / 1800	23.5 / 17.4	20 3/4"	17 5/8"	1 1/8"	3"	10 7/8"	15 1/8"	13"	17 1/4"
16822	66822	16917	2400 / 1800	23.5 / 17.4	22 1/4"	17 5/8"	1 1/8"	3"	10 3/4"	15"	14 3/8"	18 5/8"
16823	66823	16917	2400 / 1800	23.5 / 17.4	21"	16 3/4"	1 1/8"	3"	9 7/8"	14 1/8"	13 1/8"	17 3/8"
16828	66828	16917	2400 / 1800	23.5 / 17.4	24"	17"	1 1/8"	3"	10 1/4"	14 3/8"	16 1/8"	20 3/8"
Powder coated Steel Shroud												
16919	-----	16917	2400 / 1800	23.5 / 17.4	19 1/2"	18"	1 1/8"	3"	9"	11"	---	---



Hardware kit



+ Optional PWM - Includes a full PWM Controller, installation hardware and instructions.

See page 66 for details on how it works.



## A14 Single Powerpack

- High output 265-watt two speed motor
- Puller (engine side) applications only
- Air pressure relief vents (Excludes 16817)

Part No. 16820

Part No.	With PWM Controller*	Repl. Fan	CFM* High/Low	Amp Draw High/Low	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)	Dim G. (Mounting)	Dim H. (Mounting)
16817 <b>NEW</b> → 66817		16913	2100 / 1500	22 / 16.2	17"	16 3/8"	1 1/8"	2 3/4"	4 1/4"	13 1/2"	9 1/2"	14"
16820	66820	16913	2100 / 1500	22 / 16.2	20"	16 3/8"	1 1/8"	2 3/4"	12 1/4"	16 1/2"	9 5/8"	13 7/8"
16827	66827	16913	2100 / 1500	22 / 16.2	23 7/16"	15 7/16"	1 1/8"	2 3/4"	8 5/8"	12 7/8"	15 5/8"	19 7/8"



Hardware kit



See page 62 for hole dimension legend.

## A12 Single Powerpack

- High output 300-watt motor
- Puller (engine side) applications only
- Air pressure relief vents (Excludes 16815)



Part No. 16814

Part No.	Repl. Fan	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)	Dim G. (Mounting)	Dim H. (Mounting)
16814	16924	2000	24.8	18"	12 7/8"	2 3/4"	4"	5 1/8"	11 3/4"	9 3/8"	16"
<b>NEW</b> → 16815	16924	2000	24.8	13"	13"	2 3/4"	4"	5 1/8"	11 3/4"	4 5/8"	11"



THE LEADER IN PERFORMANCE COOLING

# High Output Dual Rad Fan Aluminum Powerpacks




## Features and Benefits

- Powerful, primary cooling fans eliminate fuel & horsepower-robbing belt driven fans
- Aircraft-quality natural satin aluminum finish can be polished, painted or anodized
- Increases fuel economy
- Multiple mounting options
- Includes illustrated instructions and mounting hardware

Fan Controllers sold separately, see page 74-76.

## Dimensions

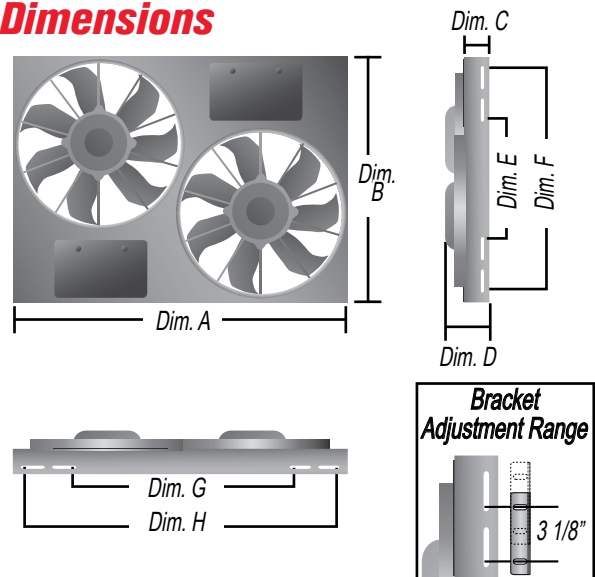






Optional PWM Controller

Part No. 16836

## A12 Dual Powerpack

- High output 300-watt motors
  - Puller (engine side) applications only
  - Sealed waterproof and dustproof, IP68 Certified
  - Air pressure relief vents (Excludes 16825 & 66825)
- + Optional PWM - Includes a full PWM Controller, installation hardware and instructions.  
See page 66 for details on how it works.

### Hardware kit



Part No.	With PWM Controller*	Repl. Fan	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)	Dim G. (Mounting)	Dim H. (Mounting)
16825	66825	16924	4000	49.6	25 5/8"	15 1/8"	2 3/4"	4"	7 5/8"	13 5/8"	17 3/8"	23 3/8"
16826	66826	16924	4000	49.6	25 5/8"	17 1/8"	2 3/4"	4"	9 5/8"	15 5/8"	17 3/8"	23 3/8"
16836	66836	16924	4000	49.6	26 3/8"	16"	2 3/4"	4"	8 1/2"	14 1/2"	18 1/8"	24 1/8"
16837	66837	16924	4000	49.6	27"	18"	2 3/4"	4"	10 1/2"	16 1/2"	18 3/4"	24 3/4"
16838	66838	16924	4000	49.6	28 1/4"	17"	2 3/4"	4"	9 1/2"	15 1/2"	20"	25 7/8"
16842	66842	16924	4000	49.6	26"	18"	2 3/4"	4"	10 1/2"	16 1/2"	17 3/4"	23 3/4"
Steel Shroud (Powder coated Silver)												
16927	66927	16924	4000	49.6	26"	18"	2 3/4"	4"	10 1/2"	16 1/2"	17 3/4"	23 3/4"



Optional PWM Controller

Part No. 16833

## A11 Dual Powerpack

- High output 225-watt motors
  - Puller (engine side) applications only
  - Air pressure relief vents
- + Optional PWM - Includes a full PWM Controller, installation hardware and instructions.  
See page 66 for details on how it works.

### Hardware kit



Part No.	With PWM Controller*	Repl. Fan	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)	Dim G. (Mounting)	Dim H. (Mounting)
16830	66830	16920	3750	37.4	22 1/2"	19"	2 3/4"	4"	11 1/2"	17 1/2"	14 1/4"	20 1/4"
16831	66831	16920	3750	37.4	24"	15 1/2"	2 3/4"	4"	7 15/16"	13 15/16"	15 3/4"	21 3/4"
16833	66833	16920	3750	37.4	24"	17"	2 3/4"	4"	9 1/2"	15 1/2"	15 3/4"	21 3/4"
16835	66835	16920	3750	37.4	23 3/4"	19 3/4"	2 3/4"	4"	12 1/4"	18 1/4"	15 1/2"	21 1/2"



THE LEADER IN PERFORMANCE COOLING

# High Output Dual Rad Fan Aluminum Powerpacks





+ **Optional PWM** - Includes a full PWM Controller, installation hardware and instructions.  
See page 66 for details on how it works.



## A10S Dual Powerpack

- 2 High output motors
- Puller (engine side) applications only
- Ultra-quiet skewed blade design

Hardware kit



See page 54 for mounting dimensions legend.

Part No.	With PWM Controller*	Repl. Fan	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)	Dim G. (Mounting)	Dim H. (Mounting)
16812 <b>NEW</b>	66812	16110	1650	18.4	24 3/4"	11 1/2"	1 1/8"	3 1/4"	17"	21 1/4"	4 5/8"	9 1/4"





+ **Optional PWM** - Includes a full PWM Controller, installation hardware and instructions.  
See page 66 for details on how it works.



## A12S Dual Powerpack

- 2 High output motors
- Puller (engine side) applications only
- Ultra-quiet skewed blade design
- Designed for maximum performance at high-static pressure loads

Hardware kit



See page 54 for mounting dimensions legend.

Part No.	With PWM Controller*	Repl. Fan	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)	Dim G. (Mounting)	Dim H. (Mounting)
16850 <b>NEW</b>	66850	16112	2675	28.4	26"	14"	1-1/8"	3-3/4"	18"	22-1/2"	11"	12-1/2"




+ **Optional PWM** - Includes a full PWM Controller, installation hardware and instructions.  
See page 66 for details on how it works.



## A17 Dual Powerpack

- 2 High output 265-watt two speed motors
- Puller (engine side) applications only
- Ultra-quiet skewed blade design
- Designed for maximum performance at high-static pressure loads

Hardware kit



See page 54 for mounting dimensions legend.

Part No.	With PWM Controller*	Repl. Fan	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)	Dim G. (Mounting)	Dim H. (Mounting)
16843 <b>NEW</b>	66843	18217	4800 / 3600	47 / 34.8	34"	17-1/4"	1 1/8"	3 3/4"	26-1/4"	30-1/2"	14-3/4"	16 1/2"

# High Output Rad Fan Molded Powerpacks




## Features and Benefits


- Powerful, primary cooling fans eliminate fuel & horsepower-robbing belt driven fans
- Increases fuel economy
- Fan housing includes stator-flow directors
- Ultra-quiet patented skewed-blade design
- Includes illustrated instructions and mounting hardware

Fan Controllers sold separately, see page 66-68.

## Dimensions

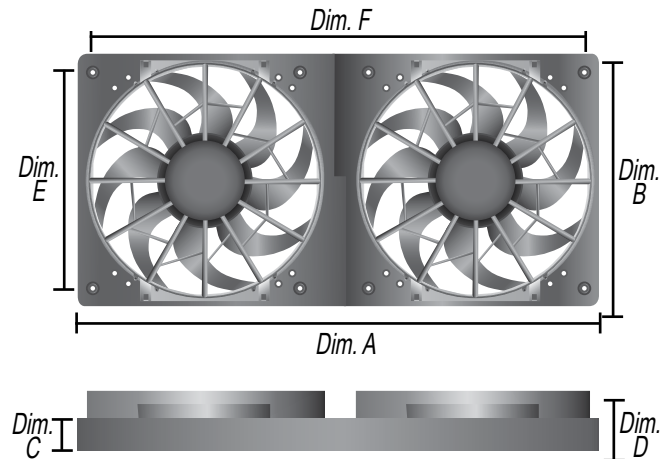

Hardware kit



Hardware Kit Only Part # 13001

## M12 Single Vented Powerpack

- High output 265-watt motor
- Puller (engine side) applications only
- Air pressure relief vents



Part No.	Repl. Fan	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)
16926	16925	2000	23.4	15 3/4"	15 3/4"	1 7/8"	3 1/4"	12 7/8"	12 7/8"



Part No. 16928

## M12 Dual Vented Powerpack

- High output 265-watt motor(s)
- Puller (engine side) applications only
- Air pressure relief vents (Excludes 16928)

Hardware kit



Hardware Kit Only Part # 13001 (2 Required)



Part No.	Repl. Fan	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)
16928	16925	4000	46.8	28 5/8"	13 7/8"	1 1/2"	3 1/4"	11 3/8"	25 5/8"
16934	16925	4000	46.8	31 3/8"	15 3/4"	1 3/8"	3 1/4"	12 7/8"	28 7/8"





THE LEADER IN PERFORMANCE COOLING

# High Output Electric Fans




## Features and Benefits

- **Designed for maximum performance at high static-pressure loads for more effective cooling**
- **Powerful, reliable motors provide years of trouble-free service**
- **Increases engine horsepower and torque**
- **Mounting hardware included**

Fan Controllers sold separately, see page 66-68.

## Dimensions

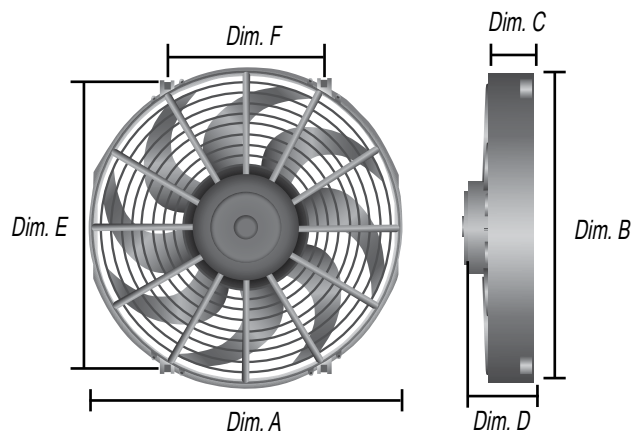

## High Output Single Rad Fans

- High output 265-watt 2 speed motors
- State of the art symmetrical design can be used as a pusher or a puller without flipping blade or reversing polarity
- Ultra quiet patented blades
- Premium - patented ratchet mounting system
- Standard - push-through plastic rod mount system




Part No.  
16217/  
18217




### Premium kit



### Standard kit

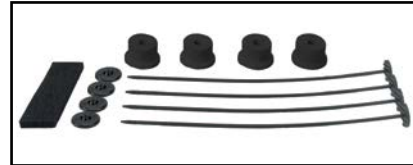

Premium Part No.	Standard Part No.	Fan Size	Airflow	CFM* High / Low	Amp Draw High / Low	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)
16212	18212	12"	Reversible	1450 / 1000	21 / 15	12 3/4"	12 3/4"	N/A	2 5/8"	8 1/4"	11 5/8"
16214	18214	14"	Reversible	2100 / 1500	22 / 16.2	14 1/2"	14 1/2"	N/A	2 5/8"	8 7/8"	12 3/4"
16217	18217	17"	Reversible	2400 / 1800	23.5 / 17.4	16 7/8"	16 7/8"	N/A	2 5/8"	8 7/8"	15 5/8"

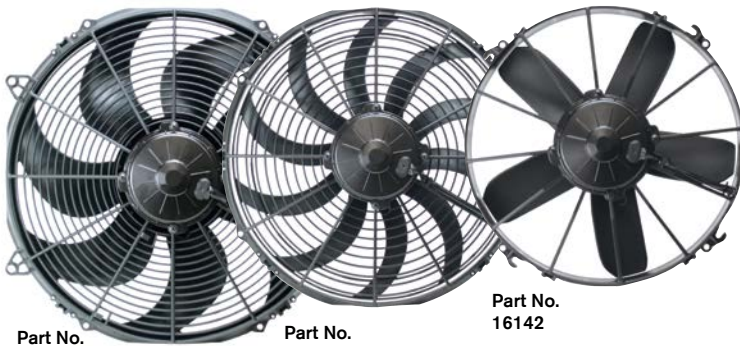

Part No.  
16136

Part No.  
16114

Part No.  
16142


## High Output Extreme Single Fans

- Sealed waterproof/dustproof designs (IP68 Certified) are perfect for off-road and all season environments
- Ultra-low profile designs (Part no.'s 16110 & 16112)
- Paddle blades pull large volumes of air for maximum heat-extraction capabilities in more compact package
- Puller (engine side) applications only



Part No.  
16105

### Hardware kit



Hardware Kit Only Part # 16744



Part No.	Fan Size	Airflow	Blade Style	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)
16105	5"	Puller	Paddle	315	3.6	5 5/8"	6 1/4"	1 1/4"	2 1/4"	4 1/4" - 3 hole mount	
16108	8"	Puller	Straight	366	5.5	8"	8 1/4"	1 1/4"	2"	5 15/16"	5 15/16"
16109	9"	Puller	Curved	625	7.2	9 11/16"	9 11/16"	1 1/8"	2"	5 1/2"	8 1/8"
16110	10"	Puller	Curved	802	9.2	10 9/16"	11 1/8"	1 1/8"	2 1/16"	9 11/16"	5 13/16"
16920	11"	Puller	Paddle	1875	16	12"	12 5/16"	2 1/4"	3 5/16"	6 3/4"	11 3/4"
16112	12"	Puller	Curved	1328	14.2	12 9/16"	13 3/16"	1 1/8"	2 7/16"	11 7/16"	6 5/8"
16918	12"	Puller	Paddle	1350	16.0	12"	12"	1 5/8"	3 1/2"	10 5/8"	7 7/8"
16142	13"	Puller	Paddle	1900	21.8	13 1/16"	13 1/16"	2 1/4"	3 3/4"	9 5/16"	9 5/16"
16114	14"	Puller	Curved	1864	21.5	14 7/16"	15 1/16"	1 1/8"	3 7/16"	13 1/16"	7 9/16"
16116	16"	Puller	Curved	2024	21.0	15 11/16"	16 1/4"	1 1/8"	3 7/16"	14 1/16"	8 1/8"
16136	16"	Puller	Curved	1918	25.4	15 11/16"	15 11/16"	2 1/16"	3 3/4"	14 1/16"	8 1/8"



Part No.  
16516/  
16626/  
16016




Part No.  
16507/  
16617




## Tornado Single Fans

- 16" and 14" sizes designed as primary cooling fans eliminate fuel & horsepower-robbing belt driven fans
- Ultra-quiet patented skewed blade design
- Premium - Includes mounting kit, lighted toggle switch and wiring
- Standard - Includes mounting kit
- Fan and thermostat part no. includes mounting kit, 180°F thermostat, probes and relay harness

### Premium kit



### Standard kit



### Fan w/ Thermostat kit



Premium Part No.	Standard Part No.	Fan w/Thermostat Part No.	Fan Size	Airflow	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)
16507	16617	-----	7"	Reversible	400	4.8	7 1/4"	7 1/8"	1 3/8"	2 3/8"	5 3/8"	5 3/8"
16508	16618	-----	8"	Reversible	500	4.8	8 1/4"	8"	1 3/8"	2 3/8"	6"	6"
16509	16619	-----	9"	Reversible	570	5.4	9 5/8"	9 1/2"	1 1/4"	2 1/2"	8 7/8"	5"
16510	16620	-----	10"	Reversible	650	5.3	11 1/4"	10 5/8"	1 1/2"	2 1/2"	9 5/8"	6 7/8"
16512	16622	-----	12"	Reversible	880	8.8	12 1/2"	11 1/2"	1 1/2"	2 1/2"	11 1/8"	5 7/8"
16514	16624	16014	14"	Reversible	1350	10.5	14 1/2"	14"	1 3/4"	3 1/4"	12 1/4"	9"
16516	16626	16016	16"	Reversible	2175	18.4	16 3/4"	15 3/4"	1 3/4"	4 1/8"	13 3/4"	9 3/4"



Part No.  
16834

## Tornado Dual Fans w/ Brackets

- Available with dual 12" or 14" Tornado fans
- Sturdy metal bracket system
- Black powder coated finish
- Can be used for pusher or puller applications



Part No.	Fan Size	Airflow	CFM*	Amp Draw (Fan 1 / 2)	Dim A. (Width)	Dim B. (Height)	Dim C. (Overall Depth)	Dim D. (Mounting)	Dim E. (Mounting)	Dim F. (Mounting)
16824	Dual 12"	Reversible	1760	8.8 / 8.8	27 3/4"	14"	2 1/2"	10 1/8"	13 5/8"	23 1/2"
16834	Dual 14"	Reversible	2700	10.5 / 10.5	31 3/4"	15 5/8"	3 1/4"	12 1/8"	14 5/8"	27 1/2"



# High Output Electric Fans



THE LEADER IN PERFORMANCE COOLING



Part No. 16913



Part No. 16925



Part No. 16924

Part No.	Fan Size	CFM* High / Low	Amp Draw High / Low	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim C. (Overall Depth)	Dim E. (Mounting)	Dim F. (Mounting)
16913	14"	2100 / 1500	22 / 16.2	14 1/2"	14 1/2"	1 5/8"	2 5/8"	13 1/4"	8 3/4"
16917	17"	2400 / 1800	23.5 / 17.4	16 7/8"	16 7/8"	1 5/8"	2 5/8"	15 5/8"	8 7/8"
16924	12"	2000	24.8	13 1/8"	13 1/8"	2 3/8"	3 1/2"	9 3/8"	9 3/8"
16925	12"	2000	23.4	12 5/8"	12 5/8"	1 1/2"	3 1/8"	10 5/8"	7 7/8"

## Do It Yourself - Drop-in Single RAD Fans For The D.I.Y. Pros at Home!

### Installing as a Pusher

Mounting kit included for Pusher installation. No shroud necessary.

### Installing as a Puller

Choose from 1 of 4 pusher style fans that can be pullers by using your custom built shroud.\*\*



\*\*Custom built shroud not included.



Part No.  
18916



Part No.  
18910

## Dyno-Cool - Curved Blade Fans

- Powerful high-watt motors
- Low profile designs
- Quiet and efficient balanced curved blades
- Fully reversible for pusher or puller applications



REVERSIBLE



INCREASE FUEL  
ECONOMY



INCREASE HORSEPOWER  
& TORQUE

Hardware kit



Hardware Kit Only Part # 16744

Part No.	Fan Size	Airflow	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)
18910	10"	Reversible	590	5.3	11 1/2"	10 3/4"	1 1/4"	2 3/8"	8 7/8"
18912	12"	Reversible	810	8.3	12 1/4"	12 1/4"	1 1/4"	2 3/8"	4 1/4"
18914	14"	Reversible	1230	9.7	14 7/8"	14 1/8"	1 1/4"	3 1/8"	6 3/4"
18916	16"	Reversible	1980	17.3	16 1/2"	15 3/4"	1 3/4"	3 7/8"	14 1/4"



Part No.  
16914



Part No.  
16909

## Dyno-Cool - Straight Blade Fans

- Powerful high-watt motors
- Low profile designs
- Fully reversible for pusher or puller applications
- Premium kit includes adjustable thermostat



REVERSIBLE




INCREASE FUEL  
ECONOMY



INCREASE HORSEPOWER  
& TORQUE

Hardware kit



Hardware Kit Only Part # 16744

Standard Part No.	Fan Size	Airflow	CFM*	Amp Draw	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Overall Depth)	Dim E. (Mounting)
16908	8"	Reversible	350	5.3	8 1/8"	8"	1 1/4"	2 1/4"	4 3/8"
16909	9"	Reversible	475	5.5	9 9/16"	10 7/16"	1 1/4"	2 1/4"	8 7/16"
16910	10"	Reversible	625	6.4	11"	11 1/4"	1 1/8"	2 3/8"	5 3/4"
16912	12"	Reversible	725	9.0	11 3/8"	12 3/8"	1 1/8"	2 3/8"	4 3/4"
16914	14"	Reversible	1225	12.4	14 1/8"	14 3/4"	1 1/4"	3 1/4"	7 1/8"
16916	16"	Reversible	1680	15.5	16"	16 7/8"	1 1/4"	3 7/8"	8 1/8"

\* CFM tested at zero static pressure.

# Electric Fan Accessories



THE LEADER IN PERFORMANCE COOLING

## Plastic Rod Mounting Kits

- Complete electric fan mounting kit



Part #  
13001

Part #  
16744

Part No.	Description
13001	Plastic rod mounting kit
16744	Plastic rod kit with mounting feet

## Circuit Breakers


- Auto resetting design



Part #  
16751

Part No.	Description
16751	25 Amp circuit breaker
16754	50 Amp circuit breaker

## H.O. RAD Fan Premium Mounting Kit



- Patented adjustable mounting system for Derale part numbers 16212, 16214, 16217, 18212, 18214 & 18217



Part #  
16746

## Lighted Toggle Switch

- 3 pole, 12 volt switch
- Rocker type switch



Reverse View

Part No.  
16740

## Relay Wire Harness Kits



Part #  
16763

Part #  
16765

Part #  
16764

Part No.	Description
16763	40/60 Amp Single Relay Wire Harness
16765	40/60 Amp Dual Relay Wire Harness
16764	40/60 Amp Relay






# Shrouded Electric Fans - Quick Guide



Shroud Size (Width)	Width	Height	Overall Depth	Part No.	Part No. w/ PWM Controller	Description	CFM*	Amp Draw	Page
<b>13" - 19"</b>	13"	13"	4" <b>NEW</b>	<b>16815</b>	---	A12 Powerpack, Single Fan	2000	24.8	53
	15 3/4"	15 3/4"	3 1/4"	<b>16926</b>	---	M12 Powerpack, Single Fan	2000	23.4	57
	16 3/4"	17 5/8"	3"	<b>16816</b>	<b>NEW</b> <b>66816</b>	A17 Powerpack, Single Fan	2400 / 1800	23.5 / 17.4	53
	17"	16 3/8"	2 3/4"	<b>16817</b>	<b>NEW</b> <b>66817</b>	A14 Powerpack, Single Fan	2100 / 1500	22 / 16.2	53
	18"	13"	4"	<b>16814</b>	---	A12 Powerpack, Single Fan	2000	24.8	53
	18"	18"	3"	<b>16818</b>	<b>66818</b>	A17 Powerpack, Single Fan	2400 / 1800	23.5 / 17.4	53
	18 3/4"	17 5/8"	3"	<b>16819</b>	<b>66819</b>	A17 Powerpack, Single Fan	2400 / 1800	23.5 / 17.4	53
<b>19" - 24"</b>	19 1/2"	18"	3 5/8"	<b>16919</b>	---	S17 Powerpack, Single Fan	2400 / 1800	23.5 / 17.4	53
	20"	16 3/8"	2 3/4"	<b>16820</b>	<b>66820</b>	A14 Powerpack, Single Fan	2100 / 1500	22 / 16.2	53
	20 3/4"	17 5/8"	3"	<b>16821</b>	<b>66821</b>	A17 Powerpack, Single Fan	2400 / 1800	23.5 / 17.4	53
	21"	17 1/8"	3 1/2"	<b>NEW</b>	<b>67923-185 (185°F)</b>	B17 Brushless Powerpack, Single Fan	2800	35	51
				<b>NEW</b>	<b>67923-195 (195°F)</b>				
				<b>NEW</b>	<b>67923-215 (215°F)</b>				
	21"	16 3/4"	3"	<b>16823</b>	<b>66823</b>	A17 Powerpack, Single Fan	2400 / 1800	23.5 / 17.4	53
	22 1/4"	17 5/8"	3"	<b>16822</b>	<b>66822</b>	A17 Powerpack, Single Fan	2400 / 1800	23.5 / 17.4	53
	22 1/4"	17 5/8"	3 1/2"	<b>NEW</b>	<b>67922-185 (185°F)</b>	B17 Brushless Powerpack, Single Fan	2800	35	51
				<b>NEW</b>	<b>67922-195 (195°F)</b>				
				<b>NEW</b>	<b>67922-215 (215°F)</b>				
	22 1/2"	19"	4"	<b>16830</b>	<b>66830</b>	A11 Powerpack, Dual Fan	3750	18.7 Per Fan	55
	23 7/16"	15 7/16"	2 3/4"	<b>16827</b>	<b>66827</b>	A14 Powerpack, Single Fan	2100 / 1500	22 / 16.2	53
23 3/4"	19 3/4"	4"	<b>16835</b>	<b>66835</b>	A11 Powerpack, Dual Fan	3750	18.7 Per Fan	55	
24"	15 1/2"	4"	<b>16831</b>	<b>66831</b>	A11 Powerpack, Dual Fan	3750	18.7 Per Fan	55	
24"	17"	3"	<b>16828</b>	<b>66828</b>	A17 Powerpack, Single Fan	2400 / 1800	23.5 / 17.4	53	
24"	17"	4"	<b>16833</b>	<b>66833</b>	A11 Powerpack, Dual Fan	3750	18.7 Per Fan	55	
<b>24" - 34"</b>	24 3/4"	11 1/2"	3 1/4"	<b>16812</b>	<b>NEW</b> <b>66812</b>	A10 Powerpack, Dual Fans	1650	9.2 Per Fan	56
	25 5/8"	15 1/8"	4"	<b>16825</b>	<b>66825</b>	A12 Powerpack, Dual Fans	4000	24.8 Per	55
	25 5/8"	17 1/8"	4"	<b>16826</b>	<b>66826</b>	A12 Powerpack, Dual Fans	4000	24.8 Per Fan	55
	26"	17 1/8"	3 1/2"	<b>NEW</b>	<b>67926-185 (185°F)</b>	B12 Brushless Powerpack, Dual Fan	4400	28.5 Per Fan	51
				<b>NEW</b>	<b>67926-195 (195°F)</b>				
				<b>NEW</b>	<b>67926-215 (215°F)</b>				
	26"	14"	3 3/4"	<b>16850</b>	<b>NEW</b> <b>66850</b>	A12S Powerpack, Dual Fans	2675	14.2 Per Fan	56
	26"	18"	3 1/2"	<b>NEW</b>	<b>67942-185 (185°F)</b>	B12 Brushless Powerpack, Dual Fan	4400	28.5 Per Fan	51
				<b>NEW</b>	<b>67942-195 (195°F)</b>				
				<b>NEW</b>	<b>67942-215 (215°F)</b>				
	26"	18"	4"	<b>16842</b>	<b>66842</b>	A12 Powerpack, Dual Fans	4000	24.8 Per Fan	55
	26"	18"	4"	<b>16927</b>	<b>66927</b>	S12 Powerpack, Dual Fans	4000	24.8 Per Fan	55
	26 3/8"	16"	4"	<b>16836</b>	<b>66836</b>	A12 Powerpack, Dual Fans	4000	24.8 Per Fan	55
	27"	18"	4"	<b>16837</b>	<b>66837</b>	A12 Powerpack, Dual Fans	4000	24.8 Per Fan	55
	28 1/8"	17"	3 1/2"	<b>NEW</b>	<b>67938-185 (185°F)</b>	B12 Brushless Powerpack, Dual Fan	4400	28.5 Per Fan	51
				<b>NEW</b>	<b>67938-195 (195°F)</b>				
				<b>NEW</b>	<b>67938-215 (215°F)</b>				
28 1/4"	17"	4"	<b>16838</b>	<b>66838</b>	A12 Powerpack, Dual Fans	4000	24.8 Per Fan	55	
28 5/8"	13 7/8"	3 1/4"	<b>16928</b>	---	M12 Powerpack, Dual Fans	4000	23.4 Per Fan	57	
31 3/8"	15 3/4"	3 1/4"	<b>16934</b>	---	M12 Powerpack, Dual Fans	4000	23.4 Per Fan	57	
31 1/2"	10 1/4"	3 1/4"	<b>16839</b>	---	A9S Powerpack, Triple Fans	2400	9.2 Per Fan	3	
34"	17 1/4"	3 3/4"	<b>16843</b>	<b>NEW</b> <b>66843</b>	A17 Powerpack, Dual Fans	4800 / 3600	23.5 / 17.4	56	

# Single Electric Fans - Quick Guide

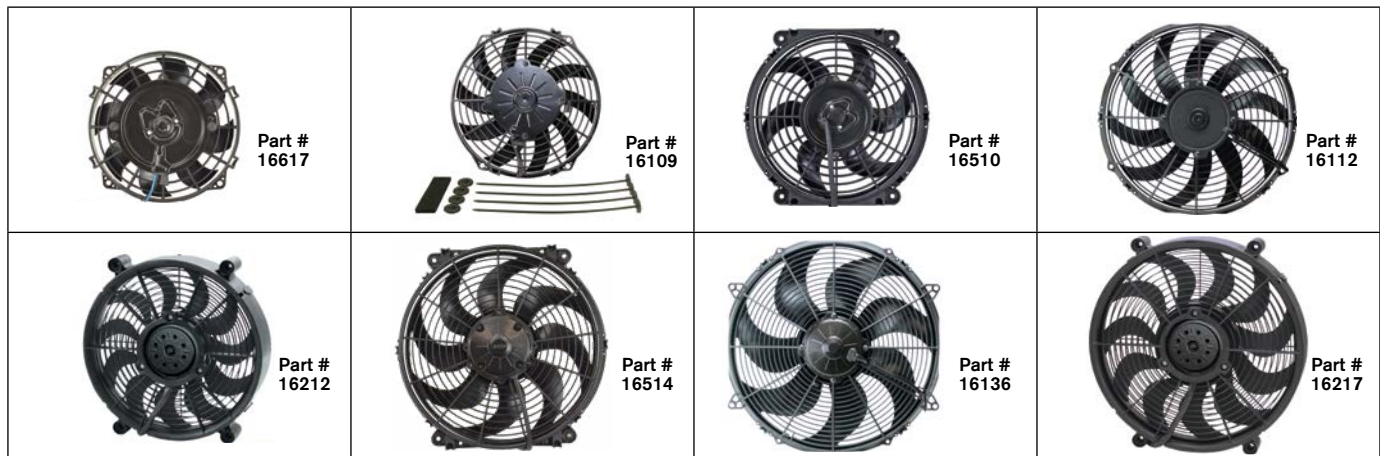

Fan Size	Overall Depth	Part No.	Airflow	CFM*	Amp Draw	Page
5"	2 1/4"	<b>16105</b>	Puller	315	3.6	59
7"	2 3/8"	<b>16507</b>	Reversible	400	4.8	60
7"	2 3/8"	<b>16617</b>	Reversible	400	4.8	60
8"	2"	<b>16108</b>	Puller	366	5.5	59
8"	2 1/4"	<b>16908</b>	Puller	350	5.3	62
8"	2 3/8"	<b>16508</b>	Reversible	500	4.8	60
8"	2 3/8"	<b>16618</b>	Reversible	500	4.8	60
9"	2"	<b>16109</b>	Puller	625	7.2	59
9"	2 1/4"	<b>16909</b>	Reversible	475	5.5	62
9"	2 1/2"	<b>16509</b>	Reversible	570	5.4	60
9"	2 1/2"	<b>16619</b>	Reversible	570	5.4	60
10"	2 1/16"	<b>16110</b>	Puller	802	9.2	59
10"	2 3/8"	<b>16910</b>	Reversible	625	6.4	62
10"	2 3/8"	<b>18910</b>	Reversible	590	5.3	62
10"	2 1/2"	<b>16510</b>	Reversible	650	5.3	60
10"	2 1/2"	<b>16620</b>	Reversible	650	5.3	60
11"	3 5/16"	<b>16920</b>	Puller	1380	11	59
12"	2 3/8"	<b>16912</b>	Reversible	725	9	62
12"	2 3/8"	<b>18912</b>	Reversible	810	8.3	62
12"	2 1/2"	<b>16622</b>	Reversible	880	8.8	60
12"	2 1/2"	<b>16512</b>	Reversible	880	8.8	60
12"	2 5/8"	<b>16212</b>	Reversible	1450 / 1000	21 / 15	59
12"	2 5/8"	<b>18212</b>	Reversible	1450 / 1000	21 / 15	59

Fan Size	Overall Depth	Part No.	Airflow	CFM*	Amp Draw	Page
12"	2 7/16"	<b>16112</b>	Puller	1328	14.2	59
12"	3"	<b>16925**</b>	Reversible	2000	23.4	61
12"	3 1/2"	<b>16918</b>	Puller	1350	16	59
12"	3 1/2"	<b>16924**</b>	Reversible	2000	24.8	61
13"	3 3/4"	<b>16142</b>	Puller	1640	21.8	59
14"	2 5/8"	<b>16214</b>	Reversible	2100 / 1500	22 / 16.2	59
14"	2 5/8"	<b>16913**</b>	Reversible	2100 / 1500	22 / 16.2	61
14"	2 5/8"	<b>18214</b>	Reversible	2100 / 1500	22 / 16.2	59
14"	3 1/8"	<b>18914</b>	Reversible	1230	9.7	62
14"	3 1/4"	<b>16014</b>	Reversible	1350	10.5	60
14"	3 1/4"	<b>16514</b>	Reversible	1350	10.5	60
14"	3 1/4"	<b>16624</b>	Reversible	1350	10.5	60
14"	3 1/4"	<b>16914</b>	Reversible	1225	12.4	62
14"	3 7/16"	<b>16114</b>	Puller	1864	21.5	59
16"	3 7/16"	<b>16116</b>	Puller	2024	21	59
16"	3 5/8"	<b>18916</b>	Reversible	1980	17.3	62
16"	3 3/4"	<b>16136</b>	Puller	1918	25.4	59
16"	3 7/8"	<b>16916</b>	Reversible	1680	15.5	62
16"	4 1/8"	<b>16016</b>	Reversible	2175	18.4	60
16"	4 1/8"	<b>16516</b>	Reversible	2175	18.4	60
16"	4 1/8"	<b>16626</b>	Reversible	2175	18.4	60
17"	2 5/8"	<b>16217</b>	Reversible	2400 / 1800	23.5 / 17.4	59
17"	2 5/8"	<b>16917**</b>	Reversible	2400 / 1800	23.5 / 17.4	61
17"	2 5/8"	<b>18217</b>	Reversible	2400 / 1800	23.5 / 17.4	59

\* CFM tested at zero static pressure. \*\*Drop-in fans-Puller applications require shroud.



THE LEADER IN PERFORMANCE COOLING

# PWM Electric Fan Controllers

## Get Complete Control of Your Engine Temperatures

Historically, cooling fans run at 100%, even when less airflow is needed, constantly turning on and off as the engine temperature changes. This reaction based temperature control system causes constant amperage spikes, excessive noise and premature wear. The Derale PWM fan controller continuously monitors your engine's temperature, therefore controlling the temperature and increasing the vehicles cooling efficiency, while reducing the amps used to do so.

Here's how it works; The controller monitors your engine temperature via the cool side of the radiator, therefore

providing a more accurate reading for your cooling system. Using Soft Start Technology, fans ramp up slowly which eliminates harmful AMP spikes. The unit will continuously monitor your engine's temperature and operate the fans at the optimum fan rate as needed. The net result; the electric fans often only run between 40-60% to keep your engine cool. Additional benefits include, reduced fan speeds which means reduced fan noise, which tends to compete with that sweet sound of your engine!

## Features and Benefits

- Soft Start Technology
- Multiple fan controller
- Reduced fan noise
- Constantly adjusts fans speed to maintain the desired temperature
- Pulse Width Modulation controls fan(s) speed from 0-100%
- Air conditioning override circuit built-in
- Includes all necessary installation hardware
- Includes auto resetting circuit breaker



- 70 AMP capacity
- 20 second cool down timer when vehicle is turned off
- Digital design
- Maintains coolant temperatures from 130°F – 230°F
- Complete pre-wired wire harness
- Black anodized 6061 aluminum housing
- Built-in protections: Short circuit, Over amperage, Low voltage, High voltage, Reverse polarity, Over temperature & Anti flyback


Part No.	Replacement Sensor	Dim A. (Width)	Dim B. (Height)	Dim C. (Depth)	Dim D. (Mounting)	Dim E. (Mounting)
16797	16757	5 13/16"	3"	1 5/8"	1 5/8"	5 1/8"

## The Temp Sensor Makes The PWM More Efficient Than Ever

The temp sensor is changing the game for the PWM Electric Fan controller. After extensive research our product development team found a better way. The temp sensor is designed for maximum efficiency. Its lean profile allows for an easy installation by using a Heavy Duty epoxy pad. Once in place, its light weight aluminum body reacts quickly to the radiator temperatures. This quick heat soaking action makes for an accurate temperature reading, crucial to keeping temperatures under control.



## Dimensions

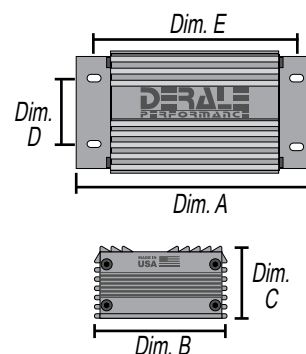



# High Amp Electric Fan Controllers




THE LEADER IN PERFORMANCE COOLING



## High Amp Adjustable Single Fan Controllers


- 35 Amp Capacity
- Adjustable fan activation range from 150°F - 240°F
- Turn-off temperature preset at 15°F below activation setting
- Die Cast Aluminum housing with bright finish
- Automatic resetting circuit breaker
- Air conditioning override circuit built-in

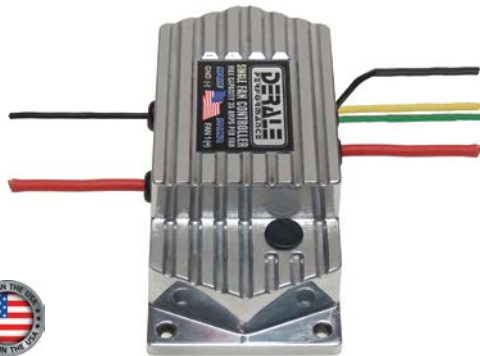

Part No.	Application	Probe	Repl. Probe No.
16778	Single Fan	Push-In	16752
16779	Single Fan	3/8" NPT	16753

## High Amp Adjustable Dual Fan Controllers

- 70 Amp Capacity (35 per output)
- Adjustable fan activation range from 150°F - 240°F
- Activate Fan #1 at desired temp, activate fan #2 10°F warmer than fan #1
- Turn-off temperature preset at 10°F below activation setting
- Die Cast Aluminum housing with bright finish
- Automatic resetting circuit breaker
- Air conditioning override circuit built-in

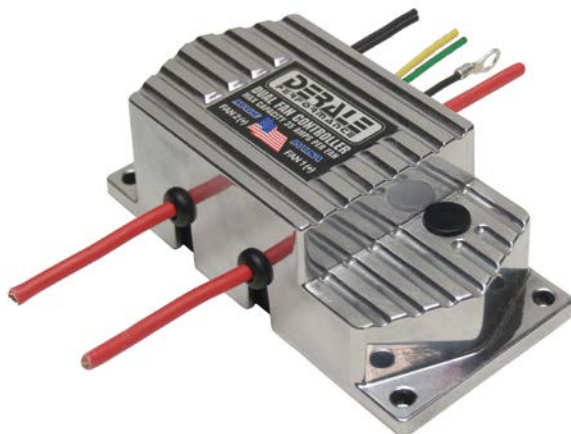


Part No.	Application	Probe	Rep. Probe No.
16788	Dual Fan	Push-In	16752
16789	Dual Fan	3/8" NPT	16753




THE LEADER IN PERFORMANCE COOLING

# Electric Fan Controllers

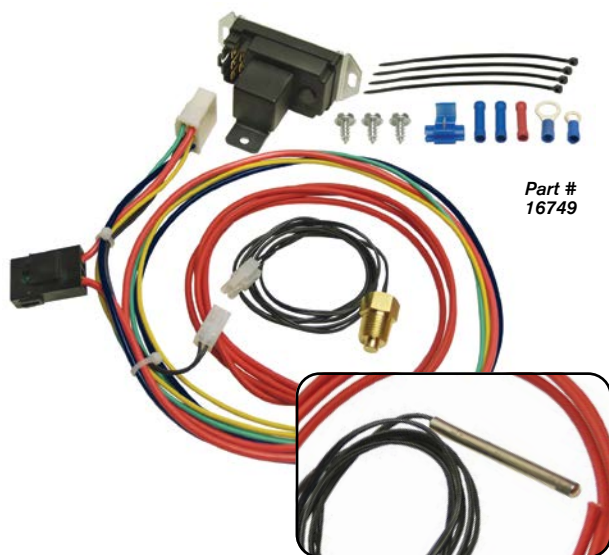

Part #  
16749




Part # 16759

## Adjustable Fan Controllers

- 25 Amp Capacity
- Adjustable fan activation range from 150°F - 240°F
- Turn-off temperature preset at 10°F below activation setting
- Interchangeable probe design, push-in radiator or 3/8" NPT thread-in probe
- Air conditioning override circuit built-in

Part No.	Application	Probe	Rep. Probe No.
16749	Single Fan	3/8" NPT Thread in	16750
16759	Single Fan	Radiator Push-in	16760

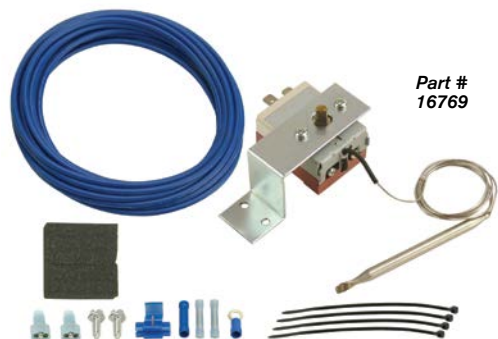

Part #  
16769

## Mechanical Fan Controller

- 16 Amp Capacity
- Adjustable fan activation range from 32°F - 240°F
- Turn-off temperature preset at 10°F below activation setting
- Radiator hose probe design

Part No.	Application	Probe
16769	Single Fan	Radiator Push-In



Part #  
16720



Part #  
16738

## Single Stage Fan Controllers

- Turn-off temperature preset at 15°F below activation setting
- Available in 180°F or 190°F Turn-on temperature
- Available in 15 or 25 amp capacity
- 25 amp capacity kits include relay and harness
- Available in push-in or thread-in probe

Part No.	Amp. Capacity	Relay	Probe	Temp Activation
16720	25 amp	40/60 amp	3/8" Thread-In	180°F
16721	25 amp	40/60 amp	3/8" Thread-In	190°F
16730	15 amp	Not Included	3/8" Thread-In	180°F
16731	15 amp	Not Included	3/8" Thread-In	190°F
16735	25 amp	40/60 amp	Push-In / 3/8" Thread-In	180°F
16738	25 amp	40/60 amp	Push-In	180°F
16739	25 amp	40/60 amp	3/8" Thread-In	180°F



THE LEADER IN PERFORMANCE COOLING

# PERFORMANCE FUEL PUMPS



## Universal Inline Fuel Pump Kits

- Compact design
- Constant high-flow rate
- Consistent pressure
- Rotary vane inline pump



Derale introduces its latest addition to its growing Performance Line-up. Our Universal Inline Fuel pumps are manufactured using only the highest quality materials, manufacturing methods and technology in order to insure maximum performance and reliability. These pumps cover a wide range of low pressure carbureted fuel system applications. They are also available for a variety of fuel types including Gasoline, Diesel, E85, E100, M100 and Racing Fuel. All Derale Universal Inline Fuel Pumps include the necessary hardware for installation as well as inline filters where applicable. Boost your fuel delivery system's efficiency and performance with our universal inline fuel pumps!



Part No.	Fuel Type	Flow rate	Max Pump Pressure
72000	Gasoline	130LPH	4-7 PSI
72001	Gasoline	100LPH	2-3.5 PSI
72003	Diesel	130LPH	4-7 PSI
72004	E85 / E100 / M100 / Racing Fuel	130LPH	4-7 PSI





THE LEADER IN PERFORMANCE COOLING


# Belt Driven Fans




## Features and Benefits

- Designed, engineered and manufactured in the USA
- Universal designs to fit most applications
- Model designs range from 13" to 20" diameters
- Most designs available in standard and reverse rotation

## Dimensions

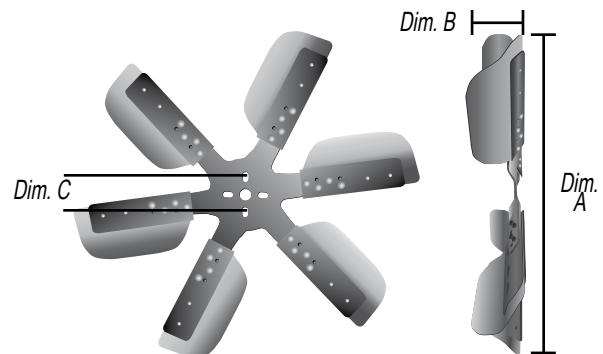

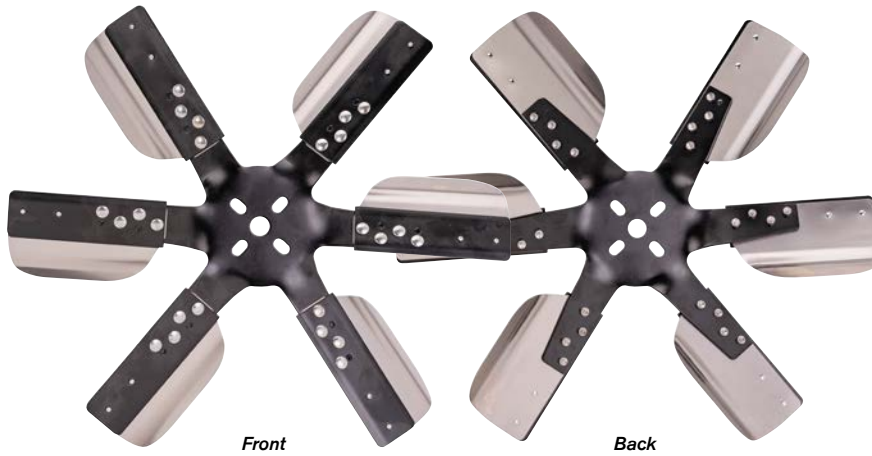

Front

Back

## Heavy Duty Flex Fans

- Rated up to 10,000 RPM's
- Improves performance and mileage
- Large surface area pulls more air at low speeds
- Heavy duty black powder coated steel hubs
- Durable stainless steel blades
- Available in standard or reverse rotation




Standard Rotation



Reverse Rotation

Stainless Black Hub Part No.	Fan Size	Rotation	Dim. A (Diameter)	Dim. B (Depth)	Dia. C (Flange)
17013	13"	Standard	13"	2"	1 3/4"-2 1/4"
17015	15"	Standard	14 3/4"	2 7/8"	1 3/4"-2 1/4"
17017	17"	Standard	17 1/4"	2 3/8"	1 3/4"-2 1/4"
17018	18"	Standard	18 1/4"	2 7/16"	1 3/4"-2 1/4"
17019	19"	Standard	19 1/4"	2 7/16"	1 3/4"-2 1/4"
17615	15"	Reverse	14 3/4"	2 7/8"	1 3/4"-2 1/4"
17617	17"	Reverse	17 1/4"	2 3/8"	1 3/4"-2 1/4"
17618	18"	Reverse	18 1/4"	2 7/16"	1 3/4"-2 1/4"
17619	19"	Reverse	19 1/4"	2 7/16"	1 3/4"-2 1/4"

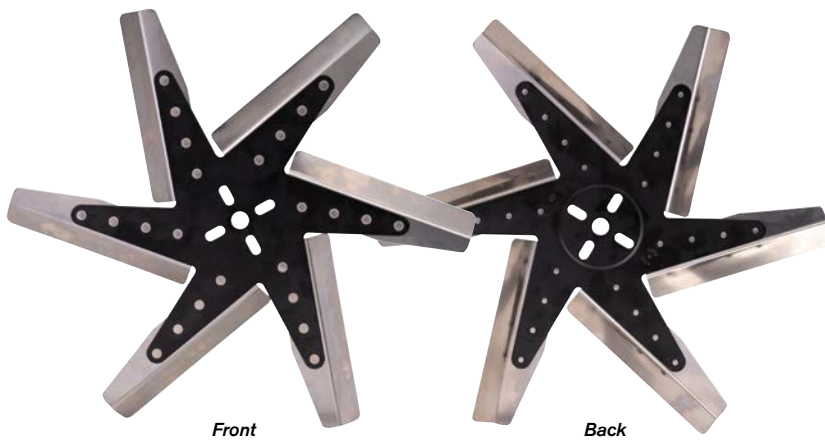

Front

Back

## High Performance Stainless

- Rated up to 8,000 RPM's
- Stainless steel fan blades
- Black powder coated hub
- Available in standard or reverse rotation




Standard Rotation



Reverse Rotation

Stainless Black Hub Part No.	Fan Size	Rotation	Dim. A (Diameter)	Dim. B (Depth)	Dia. C (Flange)
19113	13"	Standard	13 3/8"	1 1/8"	1 3/4"-2 1/4"
19115	15"	Standard	15 1/4"	1 1/8"	1 3/4"-2 1/4"
19117	17"	Standard	17"	1 1/8"	1 3/4"-2 1/4"
19118	18"	Standard	18 1/4"	1 1/8"	1 3/4"-2 1/4"
19313	13"	Reverse	13 3/8"	1 1/8"	1 3/4"-2 1/4"
19315	15"	Reverse	15 1/4"	1 1/8"	1 3/4"-2 1/4"
19317	17"	Reverse	17"	1 1/8"	1 3/4"-2 1/4"
19318	18"	Reverse	18 1/4"	1 1/8"	1 3/4"-2 1/4"

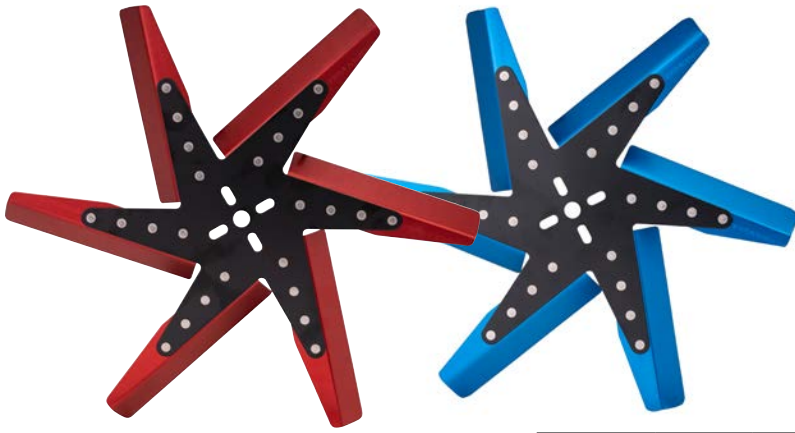

## High Performance Aluminum

- Rated up to 8,000 RPM's
- Red or Blue anodized aluminum fan blades
- Black powder coated hub
- Available in standard rotation



Black Hub Part No.	Fan Size	Rotation	Blade Color	Dim. A (Diameter)	Dim. B (Depth)	Dia. C (Flange)
19817	17"	Standard	Red	17"	1 1/8"	1 3/4"-2 1/4"
19818	18"	Standard	Red	18 1/4"	1 1/8"	1 3/4"-2 1/4"
19917	17"	Standard	Blue	17"	1 1/8"	1 3/4"-2 1/4"
19918	18"	Standard	Blue	18 1/4"	1 1/8"	1 3/4"-2 1/4"



## Rigid Race Steel Blade Fans

- Rated up to 8,000 RPM's
- Steel fan blades
- Maximum full-time airflow
- Available in standard and reverse rotation



Standard Rotation Part No.	Reverse Rotation Part No.	Fan Size	Dim. A (Diameter)	Dim. B (Depth)	Dia. C (Flange)
17313	17413	13"	13"	2 1/4"	1 3/4"-2 1/4"
17315	17415	15"	15"	2 1/4"	1 3/4"-2 1/4"
17317	17417	17"	17"	2 1/4"	1 3/4"-2 1/4"
17318	17418	18"	18"	2 1/4"	1 3/4"-2 1/4"
17319	17419	19"	18 7/8"	2 1/4"	1 3/4"-2 1/4"
17320	17420	20"	19 7/8"	2 1/4"	1 3/4"-2 1/4"



## Rigid Race Aluminum Blade Fans

- Rated up to 8,000 RPM's
- Aluminum fan blades
- Maximum full-time airflow
- Available in standard rotation





Part No.	Fan Size	Rotation	Dim. A (Diameter)	Dim. B (Depth)	Dia. C (Flange)
17513	13"	Standard	13"	2 1/4"	1 3/4"-2 1/4"
17515	15"	Standard	15"	2 1/4"	1 3/4"-2 1/4"
17517	17"	Standard	17"	2 1/4"	1 3/4"-2 1/4"
17518	18"	Standard	18"	2 1/4"	1 3/4"-2 1/4"







## Belt Driven Fan Spacers

- Strong one-piece aluminum construction
- Closed loop design
- Designed to fit 5/8", 3/4" or 1.180 water pumps
- Standard 5/8" male pilot
- Clear anodized finish
- Includes mounting hardware

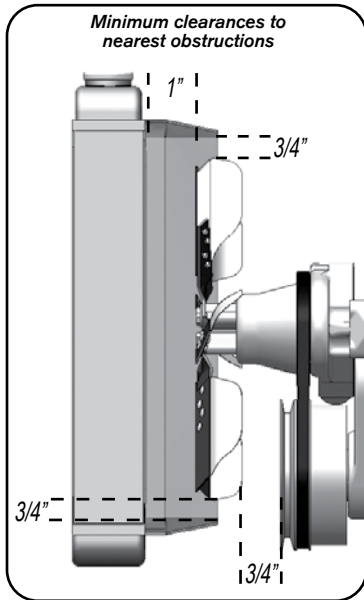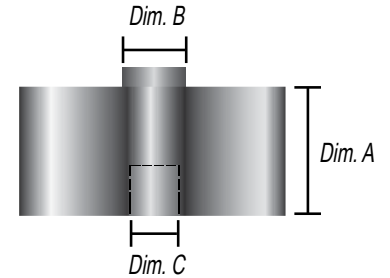

Part No.	Dim. A (Length)	Dim. B (Male Pilot Diameter)	Dim. C (Female Pilot Diameter)	Bolts (4 each)	Flange
31500	1/2"	5/8"	5/8"	5/16-18 / 5/16-24	1 3/4"-2 1/4"
31510	1"	5/8"	5/8" or 3/4"	5/16-18 / 5/16-24	1 3/4"-2 1/4"
31515	1 1/2"	5/8"	5/8" or 3/4"	5/16-18 / 5/16-24	1 3/4"-2 1/4"
31518	1 3/4"	5/8"	5/8" or 3/4"	5/16-18 / 5/16-24	1 3/4"-2 1/4"
31520	2"	5/8"	5/8" or 3/4"	5/16-18 / 5/16-24	1 3/4"-2 1/4"
31521	2"	5/8"	5/8" or 3/4"	8mm x 1.25	1 3/4"-2 1/4"
31540	2 1/4"	5/8"	5/8" or 3/4"	5/16-18 / 5/16-24	1 3/4"-2 1/4"
31547	2 1/4"	5/8"	5/8" or 3/4"	6mm x 1.00 / 8mm x 1.25	1 3/4"-2 1/4"
31550	2 1/2"	5/8"	5/8" or 3/4"	5/16-18 / 5/16-24	1 3/4"-2 1/4"
<b>NEW</b> 31552	3"	5/8"	5/8" or 3/4"	5/16-18 / 5/16-24	1 3/4"-2 1/4"
<b>NEW</b> 31553	3 1/2"	5/8"	5/8" or 3/4"	5/16-18 / 5/16-24	1 3/4"-2 1/4"



Mounting bolt circles:  
3" and 3-1/4"

## Fan Clutch Fans

- Rated up to 8,000 RPM's
- Steel fan blades
- Maximum full-time airflow
- Available in standard or reverse rotation
- Black powder coated finish



Standard Rotation Part No.	Reverse Rotation Part No.	Fan Size	Dim. A (Diameter)	Dim. B (Depth)	Dia. C (Flange)	Dia. D (Flange)
17117	17917	17"	17 1/4"	1 15/16"	2 3/8"	2 5/8"
17118	17918	18"	18"	1 15/16"	2 3/8"	2 5/8"
17119	17919	19"	19 1/8"	2 1/8"	2 3/8"	2 5/8"
17120	17920	20"	20"	1 15/16"	2 3/8"	2 5/8"

# PART NUMBER INDEX



Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
12730	13	13221	34	13730	12	15729	46	16744	63
12731	13	13222	34	13731	12	15735	40	16746	63
12732	13	13223	34	13735	14	15740	39	16749	68
12733	13	13224	34	13740	7	15746	41	16750	68
12742	13	13225	34	13750	9	15747	41	16751	63
12901	31	13249	33	13751	9	15748	43	16752	67
12902	31	13250	33	13754	9	15780	43	16753	67
12903	31	13251	33	13760	7	15799	39	16754	63
12904	31	13252	33	13764	7	15800	11	16757	66
12906	31	13257	33	13870	7	15820	11	16759	68
13001	39, 63	13259	33	13900	11	15830	12	16760	68
13002	39	13260	33	13950	9	15831	12	16763	63
13003	39	13261	33	13960	7	15840	7	16764	63
13004	35	13262	33	14000	47, 49	15845	7	16765	63
13005	46	13267	33	14002	49	15850	9	16769	68
13007	39	13269	33	14010	49	15851	9	16778	67
13008	39	13270	33	14200	48	15860	7	16779	67
13010	49	13271	33	14201	48	15865	7	16788	67
13011	14	13272	33	14202	48	15870	7	16789	67
13014	35	13277	33	14204	48	15875	7	16797	66
13016	39	13279	33	14207	48	15876	7	16812	56
13017	39	13280	33	14208	49	15900	11	16814	53
13018	35	13281	33	14210	49	15950	9	16815	53
13021	15	13282	33	15200	11	15960	7	16816	53
13024	35	13287	33	15220	11	16014	60	16817	53
13025	35	13300	11, 29	15230	12	16016	60	16818	53
13026	14	13303	30	15300	11, 29	16105	59	16819	53
13028	35	13304	30	15301	29	16108	59	16820	53
13030	35	13306	30	15302	29	16109	59	16821	53
13031	35	13309	29	15320	11	16110	59	16822	53
13032	35	13310	29	15405	25	16112	59	16823	53
13033	35	13311	29	15450	9	16114	59	16824	60
13034	35	13312	29	15451	25	16116	59	16825	55
13035	35	13313	29	15500	11	16136	59	16826	55
13041	38	13314	29	15502	31	16142	59	16827	53
13042	38	13315	29	15503	31	16212	59	16828	53
13043	38	13316	29	15505	31	16214	59	16830	55
13044	38	13317	29	15602	22	16217	59	16831	55
13045	38	13318	29	15651	22	16507	60	16833	55
13046	38	13320	11	15660	7	16508	60	16834	60
13049	46	13350	33	15700	39	16509	60	16835	55
13063	39	13401	22	15701	39	16510	60	16836	55
13090	45	13402	22	15702	40	16512	60	16837	55
13091	45	13403	22	15703	41	16514	60	16838	55
13092	45	13411	22	15704	41	16516	60	16839	3
13101	30	13412	22	15705	41	16617	60	16842	55
13102	30	13413	22	15706	41	16618	60	16843	56
13103	30	13501	27	15708	46	16619	60	16850	56
13104	30	13502	27	15709	46	16620	60	16908	62
13105	30	13503	27	15715	43	16622	60	16909	62
13106	30	13504	27	15716	43	16624	60	16910	62
13107	30	13523	27	15717	43	16626	60	16912	62
13108	30	13611	25	15718	43	16720	68	16913	61
13200	31	13612	25	15719	14	16721	68	16914	62
13210	34	13613	25	15720	40	16730	68	16916	62
13211	34	13614	25	15721	15	16731	68	16917	61
13212	31	13615	25	15724	41	16735	68	16918	59
13213	31	13633	17	15725	43	16738	68	16919	53
13215	27	13700	11	15726	14	16739	68	16920	59
13220	34	13720	11	15728	46	16740	63	16924	61



# PART NUMBER INDEX

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
16925	61	25005	46	35708	44	53481	21	66842	55
16926	57	25011	14	35709	44	53482	21	66843	56
16927	55	25044	46	35727	44	53486	21	66850	56
16928	57	25049	46	35728	44	53488	21	66927	55
16934	57	25702	40	35729	44	54006	20	72000	69
17013	71	25708	46	35747	41	54008	20	72001	69
17015	71	25709	46	35760	41	54010	20	72003	69
17017	71	25719	14	35761	41	54012	20	72004	69
17018	71	25720	40	35762	41	54078	19, 20	98000	39
17019	71	25728	46	35799	38, 44	54080	21	98003	41
17117	73	25729	46	50020	23	54081	21	98004	41
17118	73	25730	40	50022	23	54082	21	98020	39
17119	73	25731	40	50023	23	54086	21	98021	39
17120	73	25732	40	50100	23	54088	21	98100	38
17313	72	25733	40	51006	20	59006	20, 38	98101	38
17315	72	25734	40	51008	20	59008	20, 38	98102	38
17317	72	25770	40	51010	20	59010	20, 38	98103	38
17318	72	25771	40	51012	20	59012	20, 38	98104	39
17319	72	25772	40	51078	19, 20	59106	38	98105	39
17320	72	25773	40	51080	21	59108	38	98106	39
17413	72	25774	40	51081	21	59206	38	98200	38
17415	72	25782	40	51082	21	59208	38	98201	38
17417	72	25783	40	51086	21	59210	38	98202	38
17418	72	25791	14	51088	21	59306	38	98203	38
17419	72	25792	14	51606	20	59308	38	98204	38
17420	72	31500	73	51608	20	59310	38	98205	38
17513	72	31510	73	51610	20	59406	20, 38	98206	38
17515	72	31515	73	51612	20	59408	20, 38	98208	38
17517	72	31518	73	51678	19, 20	59506	20, 38	98233	39
17518	72	31520	73	51680	21	59508	20, 38	98234	39
17615	71	31521	73	51681	21	59510	20, 38	98244	39
17617	71	31540	73	51682	21	59606	38	98333	39
17618	71	31547	73	51686	21	59608	38	98344	39
17619	71	31550	73	51688	21	59706	38	98450	39
17917	73	31552	73	51906	20	59708	38	98451	39
17918	73	31553	73	51908	20	61178	5	98452	39
17919	73	33501	27	51910	20	61878	5	67922-185	51
17920	73	33502	27	51912	20	65840	5	67922-195	51
18212	59	33503	27	51978	19, 20	65860	5	67922-215	51
18214	59	33504	27	51980	21	65861	5	67923-185	51
18217	59	33523	27	51981	21	66812	56	67923-195	51
18910	62	33601	25	51982	21	66816	53	67923-215	51
18912	62	33602	25	51986	21	66817	53	67926-185	51
18914	62	33603	25	51988	21	66818	53	67926-195	51
18916	62	33604	25	52506	20	66819	53	67926-215	51
19113	71	33605	25	52508	20	66820	53	67938-185	51
19115	71	33633	17	52510	20	66821	53	67938-195	51
19117	71	35020	15	52512	20	66822	53	67938-215	51
19118	71	35021	15	52578	19, 20	66823	53	67942-185	51
19313	71	35022	15	52580	21	66825	55	67942-195	51
19315	71	35025	15	52581	21	66826	55	67942-215	51
19317	71	35026	15	52582	21	66827	53		
19318	71	35027	15	52586	21	66828	53		
19817	72	35030	3	52588	21	66830	55		
19818	72	35601	42	53406	20	66831	55		
19917	72	35603	42	53408	20	66833	55		
19918	72	35605	42	53410	20	66835	55		
20161	3	35611	42	53412	20	66836	55		
20561	3	35621	42	53478	19, 20	66837	55		
20565	3	35707	44	53480	21	66838	55		



# DERALE PERFORMANCE

3901 Medford St.

Los Angeles, CA 90063

Tel: (323) 266-3850

Fax: (323) 263-3948



RYAN LITTERAL  
FORMULA D PRO DRIVER



Visit Us Online at [DERALE.COM](http://DERALE.COM)

